

CPREG®2N LAQUÉS


2500 mm – 2 ventouses

Tension	12V DC	24V DC
Consommation	960 mA	520 mA

CARACTÉRISTIQUES TECHNIQUES			
Force de retenue * 2 x 300 daN	Température -10 / +60°C	Indice IP IP42	Pouvoir de coupure 30V DC – 0.2 A

NF S 61 937

24V DC

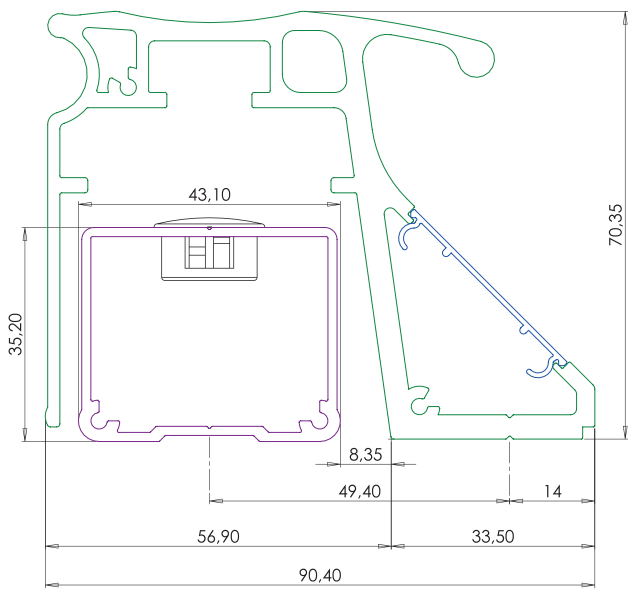

CODE ARTICLE	DESIGNATION	
CPREG2N/250-9005	CPREG2N 2,5 m – 12-24V DC – Noir 9005	GAMME INTOM
CPREG2N/250-9010	CPREG2N 2,5 m – 12-24V DC – Blanc 9010	