
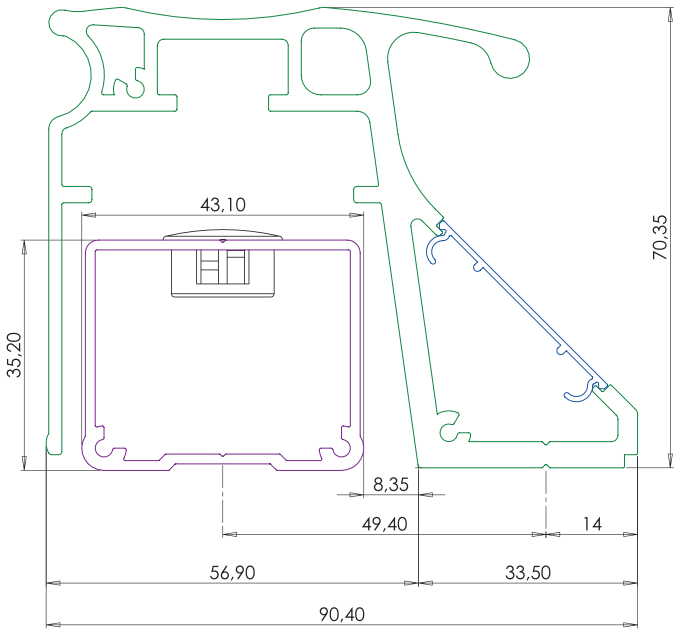


CPREG®2N

2500 mm – 2 EM locks

Voltage	12V DC	24V DC
Consumption	960 mA	520 mA

TECHNICAL SPECIFICATIONS			
Holding force* 2 x 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC - 0.2 A

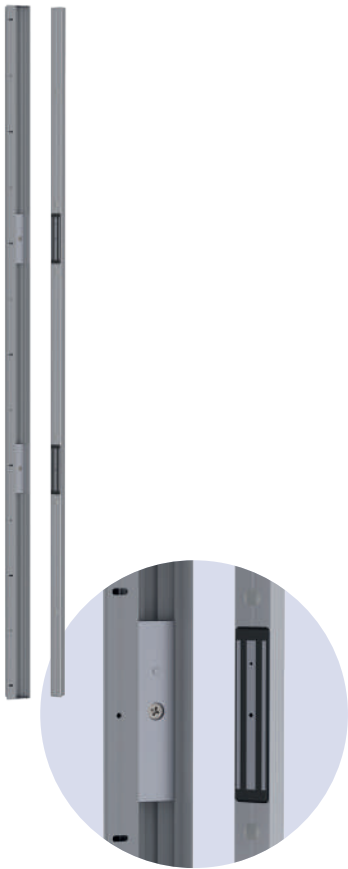

ITEM CODE	DESCRIPTION
CPREG2N/250AS	CPREG2N 2,5 m - 12-24V DC - natural anodizing
CPREG2N/250B	CPREG2N 2,5 m - 12-24V DC - to be lacquered

*Maximum theoretical holding force for implementation respecting optimal installation conditions