


CPREG®2N

600 mm – 2 EM locks

Voltage	12V DC	24V DC
Consumption	960 mA	520 mA

TECHNICAL SPECIFICATIONS			
Holding force* 2 x 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

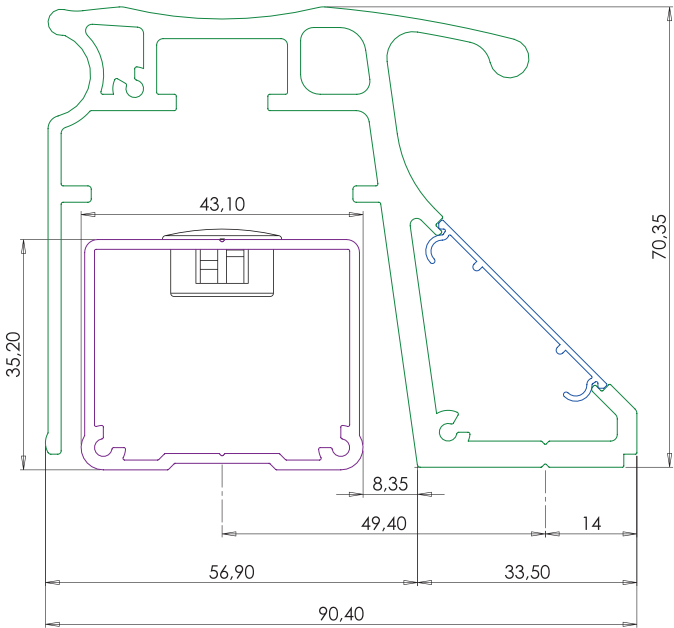

ITEM CODE	DESCRIPTION
CPREG2N/60AS	CPREG2N 600 mm – 12–24V DC – natural anodizing
CPREG2N/60B	CPREG2N 600 mm – 12–24V DC – to be lacquered