


CPREG®2NAR – LACQUERED

2500 mm – 2 EM locks

Voltage	12V DC	24V DC	48V DC
Consumption	1000 mA	520 mA	280 mA

TECHNICAL SPECIFICATIONS			
Holding force* 2 x 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

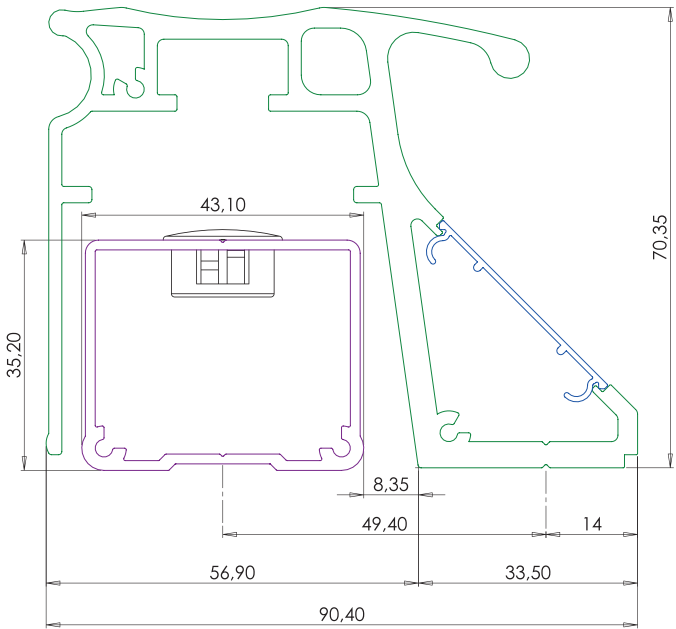

ITEM CODE	DESCRIPTION
CPREG2NAR/250-9005	CPREG2NAR 2,5 m – 12-48V DC – Black 9005 INTOM RANGE
CPREG2NAR/250-9010	CPREG2NAR 2,5 m – 12-48V DC – White 9010

*Maximum theoretical holding force for implementation respecting optimal installation conditions