


CPREG®2NAR

2500 mm – 3 EM locks

Voltage	12V DC	24V DC	48V DC
Consumption	1500 mA	780 mA	420 mA

TECHNICAL SPECIFICATIONS			
Holding force* 3 x 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

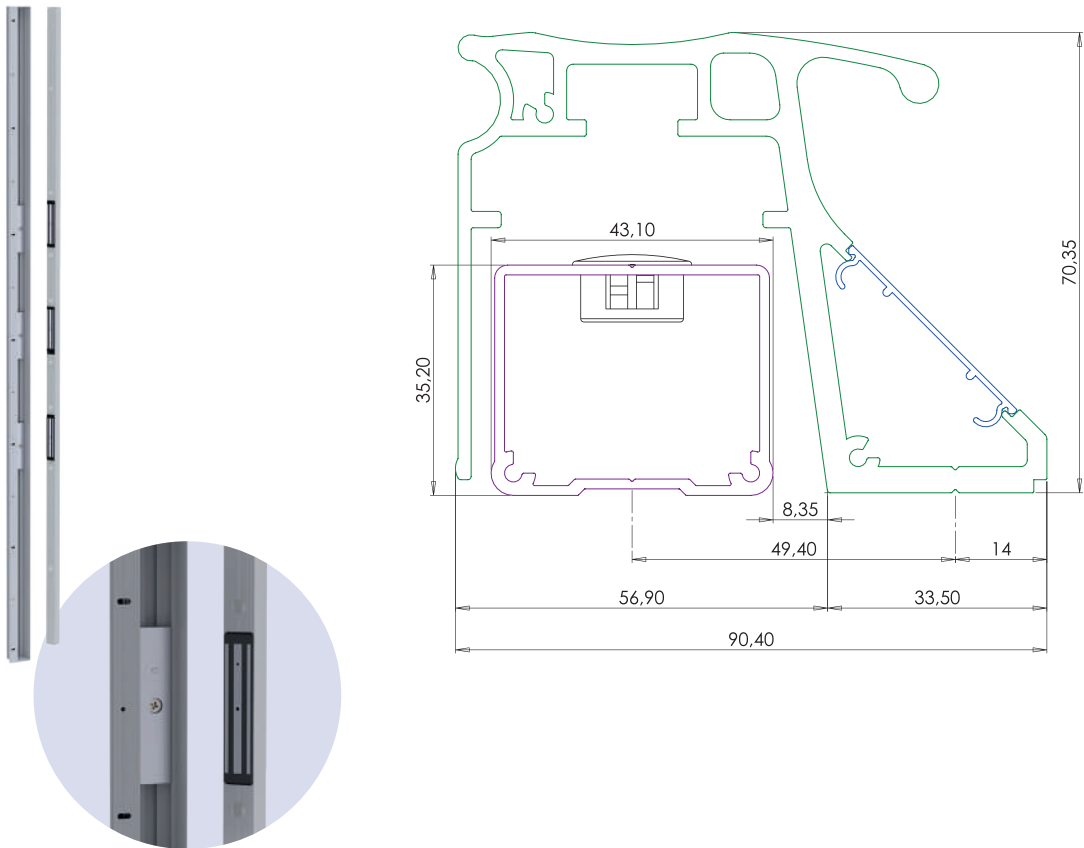

ITEM CODE	DESCRIPTION
CPREG2NAR/250AS-3	CPREG2NAR 3EML 2,5 m – 12-48V DC – natural anodizing
CPREG2NAR/250B-3	CPREG2NAR 3EML 2,5 m – 12-48V DC – to be lacquered