


CPREG®2NAR – WITH PUSH BUTTON

2500 mm – 2 EM locks

Voltage	12V DC	24V DC	48V DC
Consumption	1000 mA	520 mA	280 mA

TECHNICAL SPECIFICATIONS			
Holding force*	Temperature	IP rating	Switching capacity
2 x 300 daN	-10 / +60°C	IP42	30V DC - 0.2 A

BUTTON TECHNICAL SPECIFICATIONS		
Status colours	PB voltage	Wire length
White / Green	12V DC	135 cm

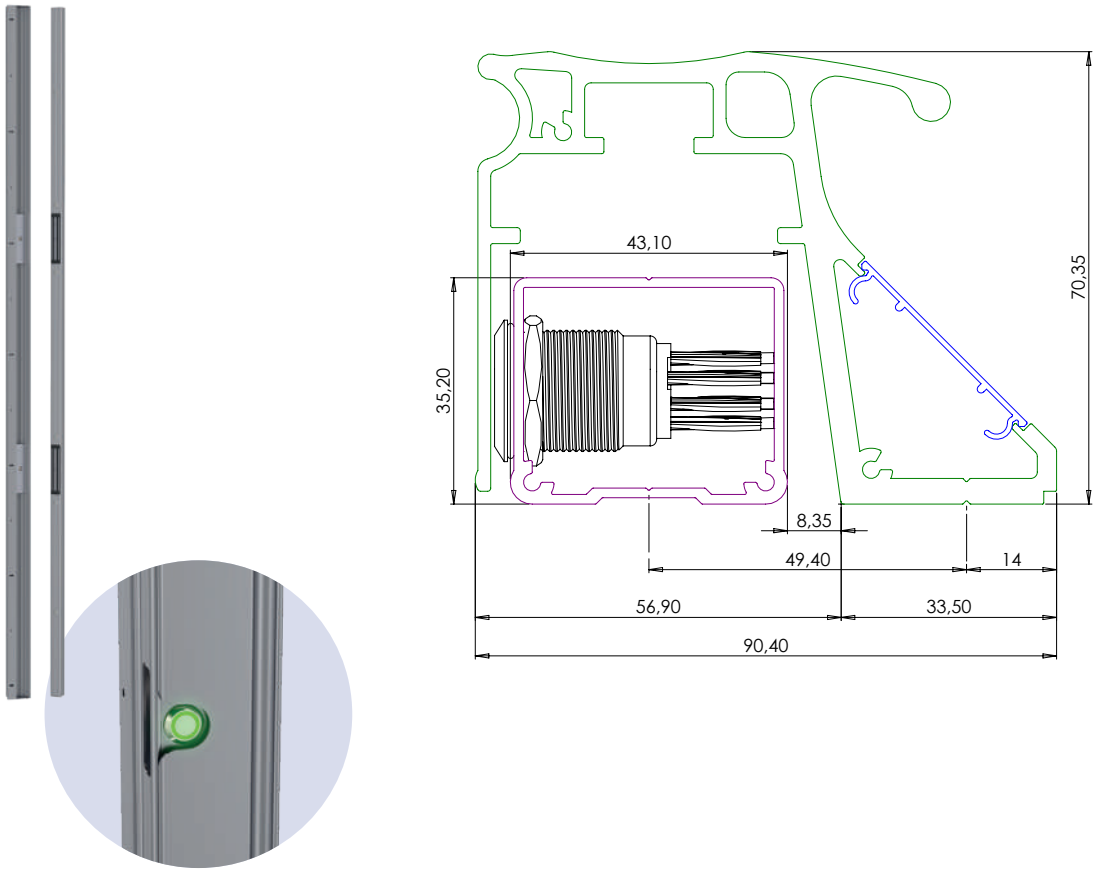

ITEM CODE	DESCRIPTION
CPREG2NAR/250AS-BP	CPREG2NAR 2,5 m - 12-48V DC - PB - natural anodizing
CPREG2NAR/250B-BP	CPREG2NAR 2,5 m - 12-48V DC - PB - to be lacquered