



CPREG®2NAR

2500 mm – 3 ventouses

Tension	12V DC	24V DC	48V DC
Consommation	1500 mA	780 mA	420 mA

CARACTÉRISTIQUES TECHNIQUES			
Force de retenue * 3 x 300 daN	Température -10 / +60°C	Indice IP IP42	Pouvoir de coupe 30V DC – 0.2 A

NF S 61 937 24/48V DC

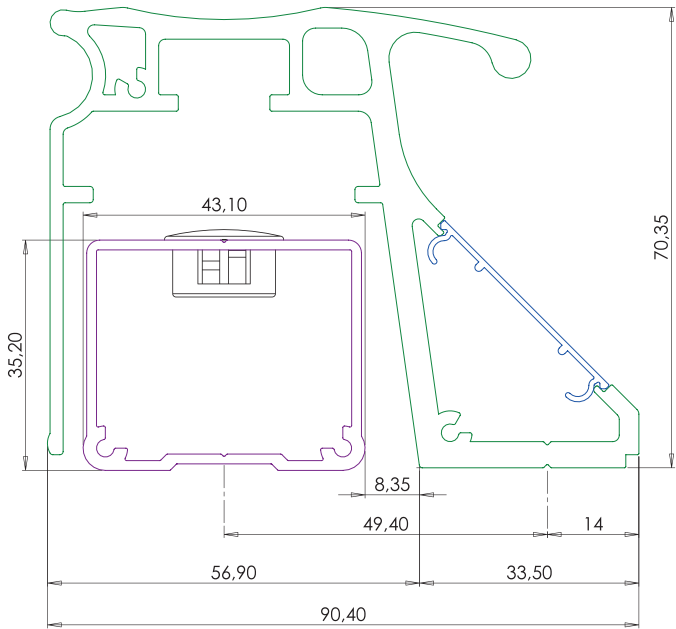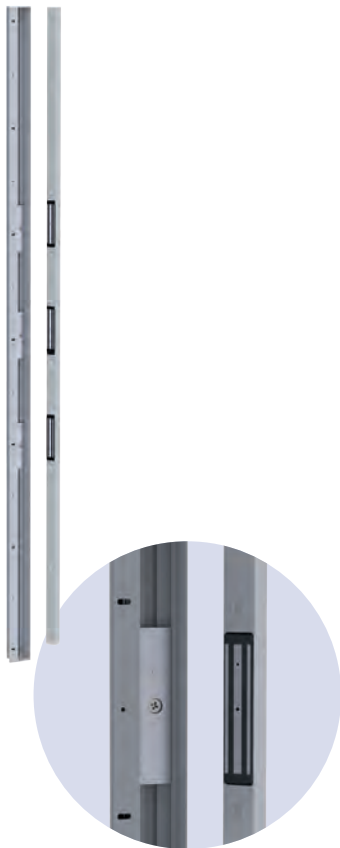

CODE ARTICLE	DESIGNATION
CPREG2NAR/250AS-3	CPREG2NAR 3VEM 2,5 m – 12-48V DC – alu satiné
CPREG2NAR/250B-3	CPREG2NAR 3VEM 2,5 m – 12-48V DC – à laquer