


CPREG®2NAR

2500 mm – 4 EM locks

Voltage	12V DC	24V DC	48V DC
Consumption	2000 mA	1040 mA	560 mA

TECHNICAL SPECIFICATIONS			
Holding force* 4 x 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

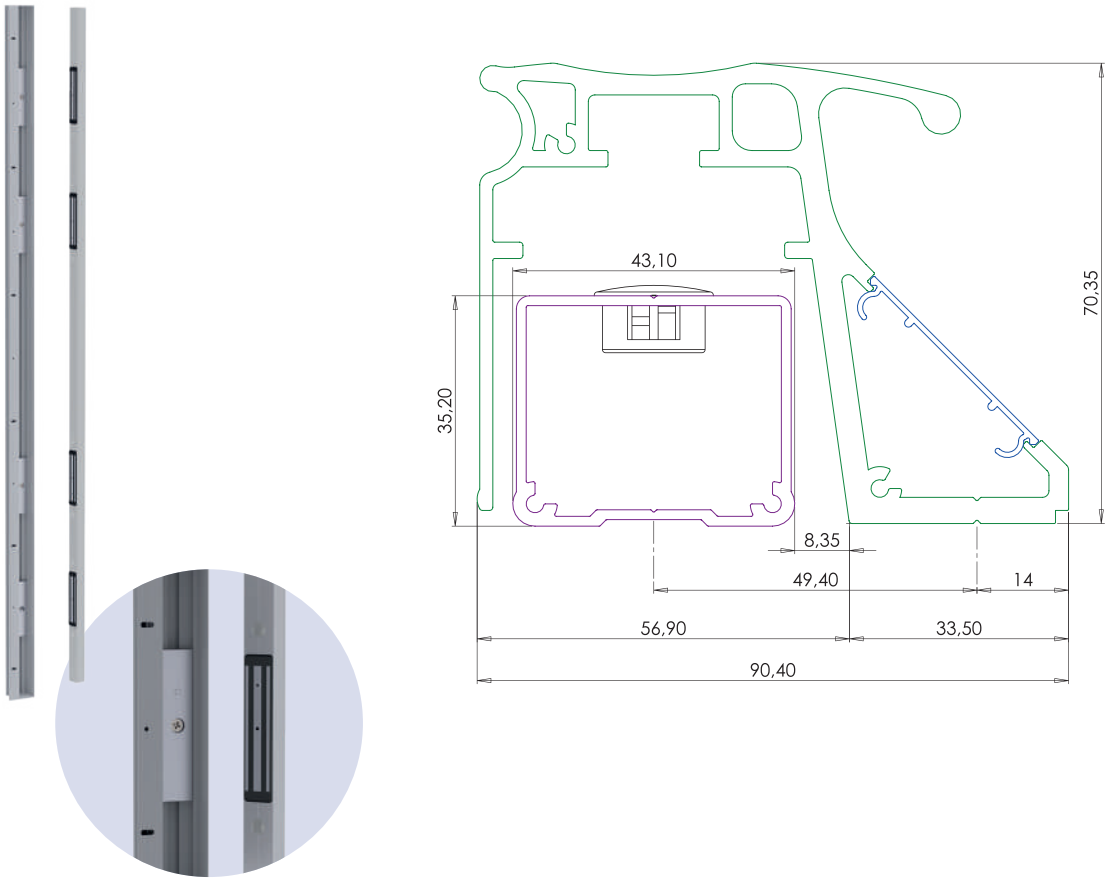

ITEM CODE	DESCRIPTION
CPREG2NAR/250AS-4	CPREG2NAR 4EML 2,5 m – 12-48V DC – natural anodizing
CPREG2NAR/250B-4	CPREG2NAR 4EML 2,5 m – 12-48V DC – to be lacquered

*Maximum theoretical holding force for implementation respecting optimal installation conditions