
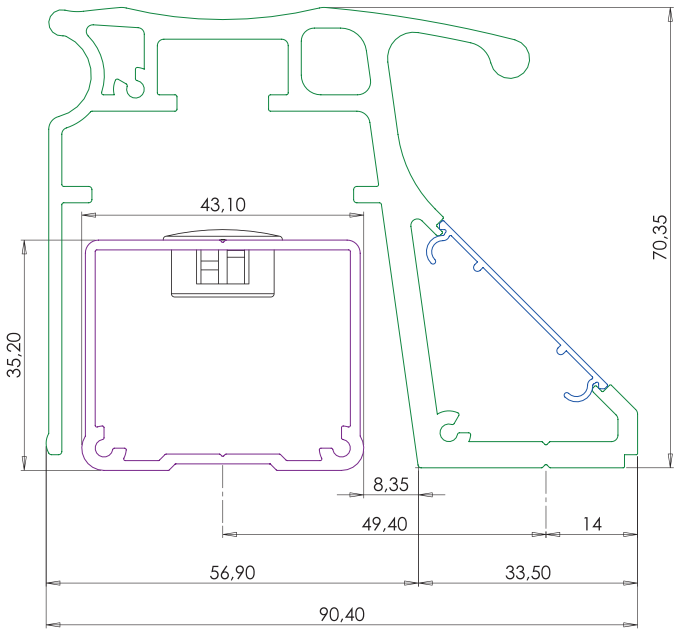


CPREG®2NAR

3000 mm – 2 EM locks

Voltage	12V DC	24V DC	48V DC
Consumption	1000 mA	520 mA	280 mA

TECHNICAL SPECIFICATIONS			
Holding force* 2 x 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

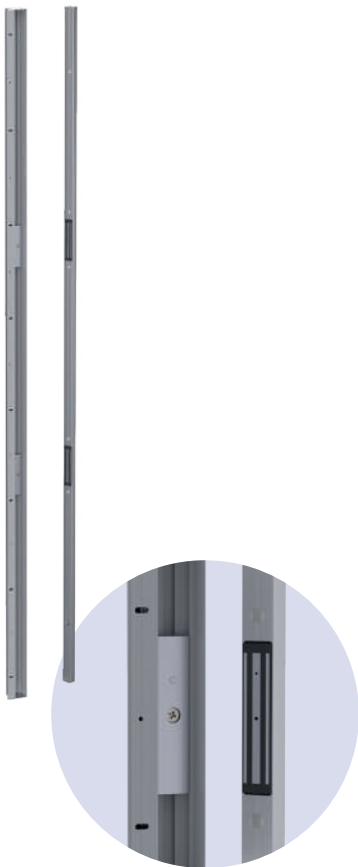

ITEM CODE	DESCRIPTION
CPREG2NAR/300AS	CPREG2NAR 3 m – 12-48V DC – natural anodizing
CPREG2NAR/300B	CPREG2NAR 3 m – 12-48V DC – to be lacquered

*Maximum theoretical holding force for implementation respecting optimal installation conditions