


# CPREG®2NAR – LACQUERED

400 mm – 1 EM lock

| Voltage     | 12V DC | 24V DC | 48V DC |
|-------------|--------|--------|--------|
| Consumption | 500 mA | 260 mA | 140 mA |

| TECHNICAL SPECIFICATIONS  |                            |                   |                                      |
|---------------------------|----------------------------|-------------------|--------------------------------------|
| Holding force*<br>300 daN | Temperature<br>-10 / +60°C | IP rating<br>IP42 | Switching capacity<br>30V DC – 0.2 A |

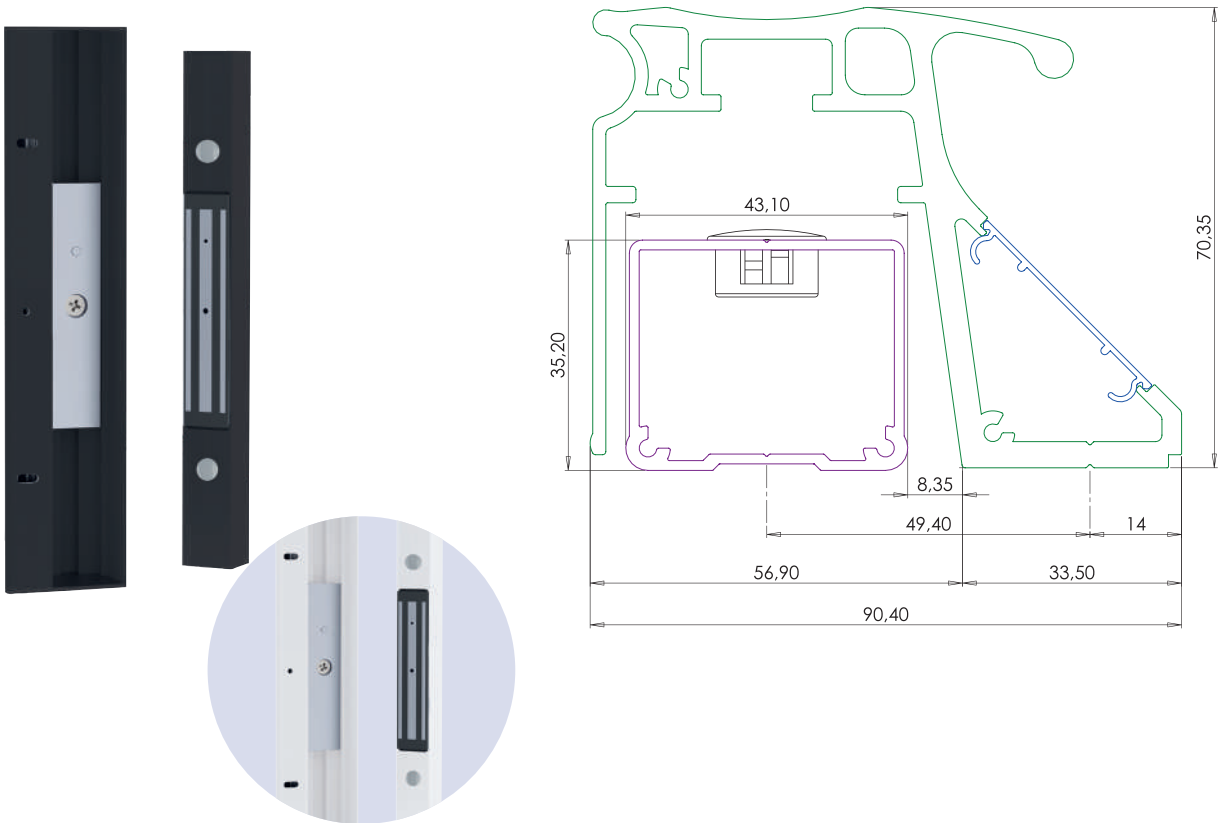

| ITEM CODE         | DESCRIPTION                                                  |
|-------------------|--------------------------------------------------------------|
| CPREG2NAR/40-9005 | CPREG2NAR 400 mm – 12-48V DC – Black 9005 <b>INTOM RANGE</b> |
| CPREG2NAR/40-9010 | CPREG2NAR 400 mm – 12-48V DC – White 9010                    |

\*Maximum theoretical holding force for implementation respecting optimal installation conditions