


CPREG[®]2NAR – WITH PUSH BUTTON

400 mm – 1 EM lock

Voltage	12V DC	24V DC	48V DC
Consumption	500 mA	260 mA	140 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

BUTTON TECHNICAL SPECIFICATIONS		
Status colours White / Green	PB voltage 12V DC	Wire length 45 cm

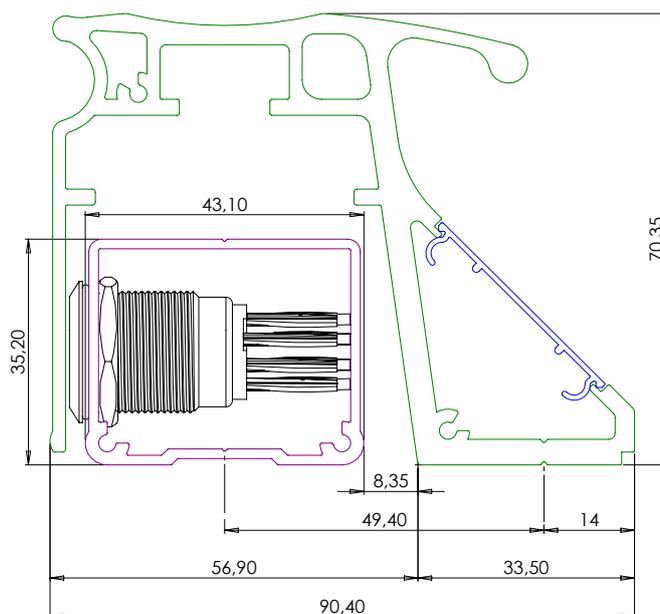

ITEM CODE

DESCRIPTION

CPREG2NAR/40AS-BP

CPREG2NAR 400 mm – 12–48V DC – PB – natural anodizing