



CPREG®6 – LUMINEUX LAQUÉS

2500 mm – 2 ventouses

Tension	12V DC	24V DC	48V DC
Consommation	1090 mA	570 mA	320 mA

CARACTÉRISTIQUES TECHNIQUES			
Force de retenue * 2 x 300 daN	Température -10 / +60°C	Indice IP IP42	Pouvoir de coupe 30V DC – 0.2 A

NF S 61 937 24/48V DC

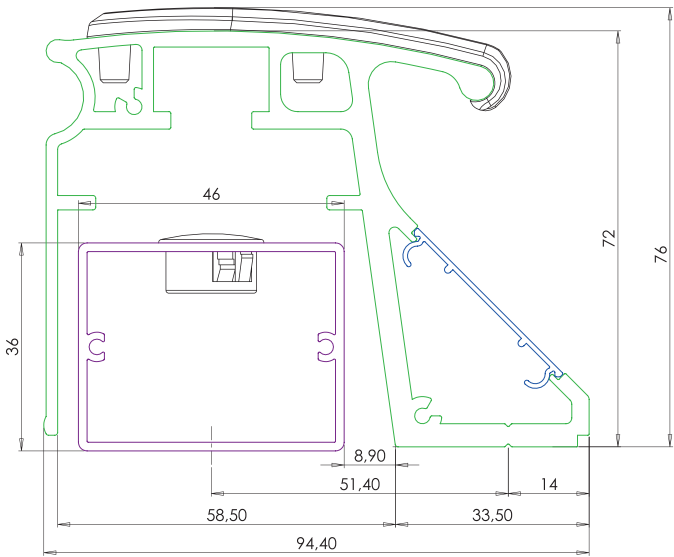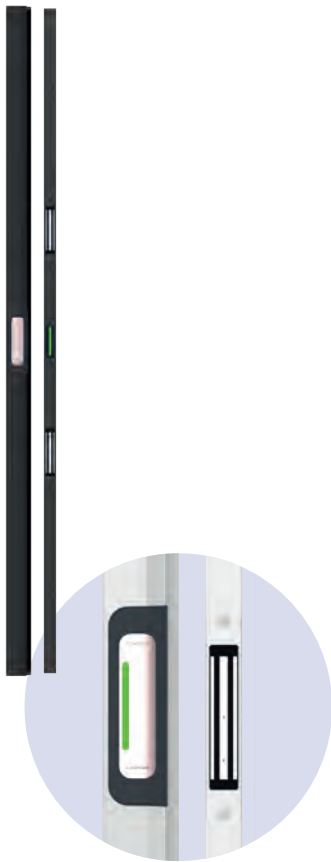

CODE ARTICLE	DESIGNATION
CPREG6/250-9005-L	CPREG6 2,5 m – 12-48V DC – Lumineux – Noir 9005 GAMME INTOM
CPREG6/250-9010-L	CPREG6 2,5 m – 12-48V DC – Lumineux – Blanc 9010