


CPREG®6 – ILLUMINATED & TALKING

2500 mm – 4 EM locks

Voltage	12V DC	24V DC	48V DC
Consumption	2090 mA	1070 mA	600 mA

TECHNICAL SPECIFICATIONS			
Holding force* 4 x 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

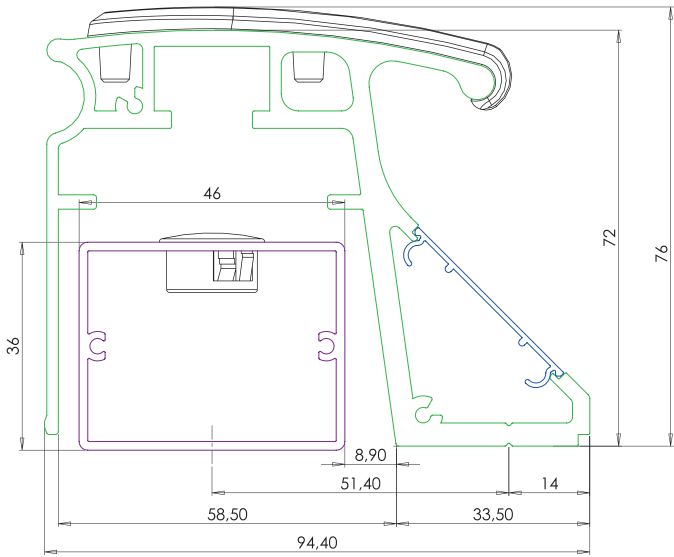

ITEM CODE	DESCRIPTION
CPREG6/250AS-HP4	CPREG6 4EML 2,5 m – 12–48V DC – Illuminated & Talking – natural anodizing
CPREG6/250B-HP4	CPREG6 4EML 2,5 m – 12–48V DC – Illuminated & Talking – to be lacquered

*Maximum theoretical holding force for implementation respecting optimal installation conditions