


# CPREG®6

## 3000 mm – 4 EM locks

| Voltage     | 12V DC  | 24V DC  | 48V DC |
|-------------|---------|---------|--------|
| Consumption | 2000 mA | 1040 mA | 560 mA |

| TECHNICAL SPECIFICATIONS      |                            |                   |                                      |
|-------------------------------|----------------------------|-------------------|--------------------------------------|
| Holding force*<br>4 x 300 daN | Temperature<br>-10 / +60°C | IP rating<br>IP42 | Switching capacity<br>30V DC – 0.2 A |

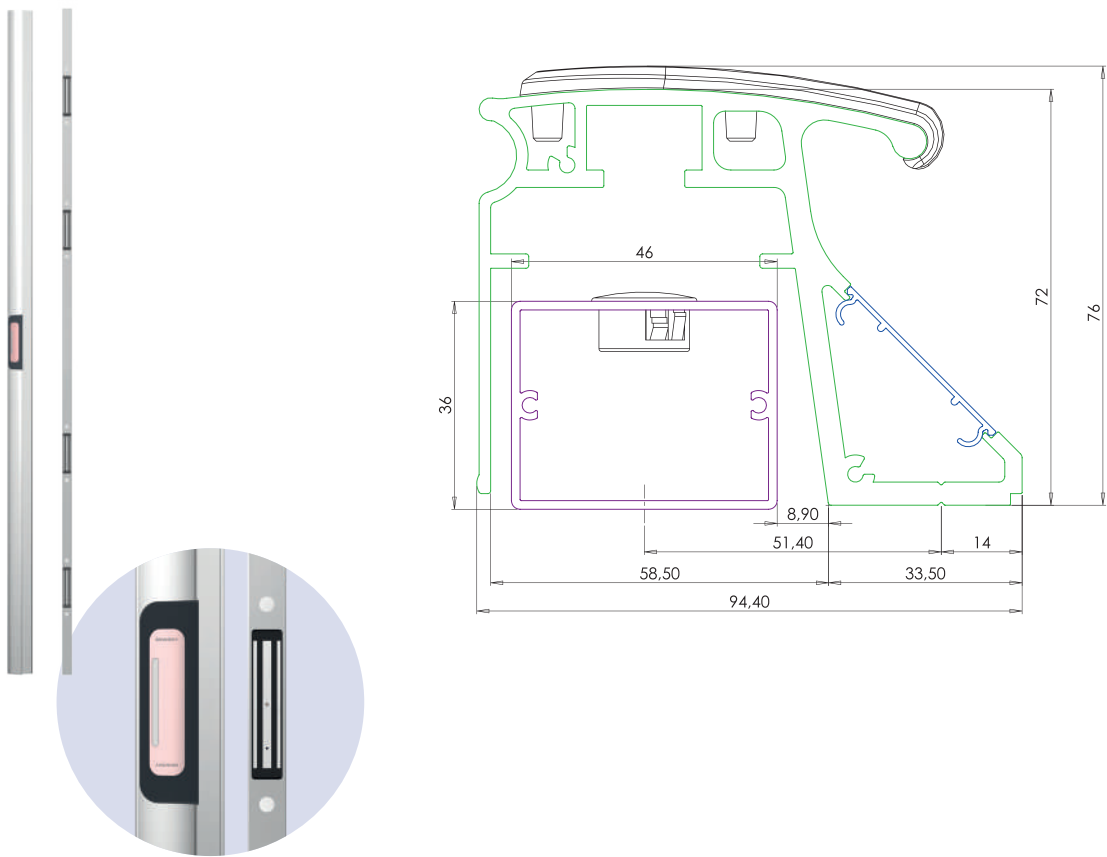

| ITEM CODE      | DESCRIPTION                                     |
|----------------|-------------------------------------------------|
| CPREG6/300AS-4 | CPREG6 4EML 3 m – 12-48V DC – natural anodizing |
| CPREG6/300B-4  | CPREG6 4EML 3 m – 12-48V DC – to be lacquered   |

\*Maximum theoretical holding force for implementation respecting optimal installation conditions