


CPREG®6

400 mm – 1 EM lock

Voltage	12V DC	24V DC	48V DC
Consumption	500 mA	260 mA	140 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	Temperature -10 / +60°C	IP rating IP42	Switching capacity 30V DC – 0.2 A

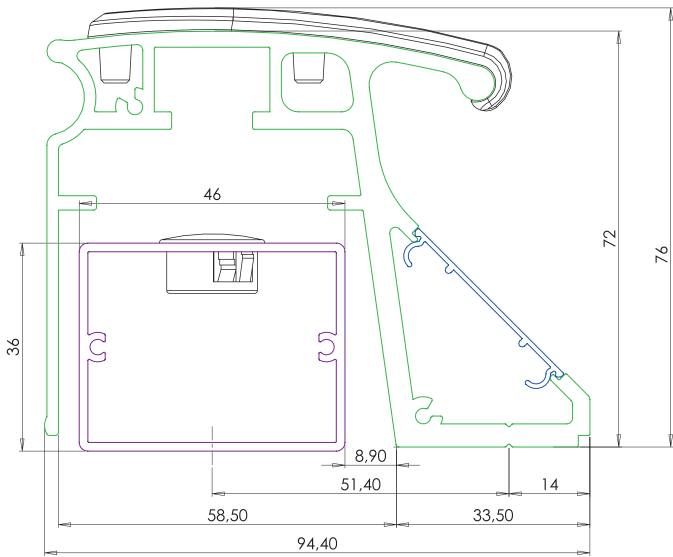

ITEM CODE	DESCRIPTION
CPREG6/40AS	CPREG6 400 mm – 12-48V DC – natural anodizing
CPREG6/40B	CPREG6 400 mm – 12-48V DC – to be lacquered

*Maximum theoretical holding force for implementation respecting optimal installation conditions