


VELMAG® – SURFACE-MOUNTED

150 daN – contact

EML

Voltage	12V DC	24V DC
Consumption	480 mA	240 mA

TECHNICAL SPECIFICATIONS			
Holding force* 150 daN	Temperature -10 / +55°C	IP rating IP42	Switching capacity 24V DC - 2 A

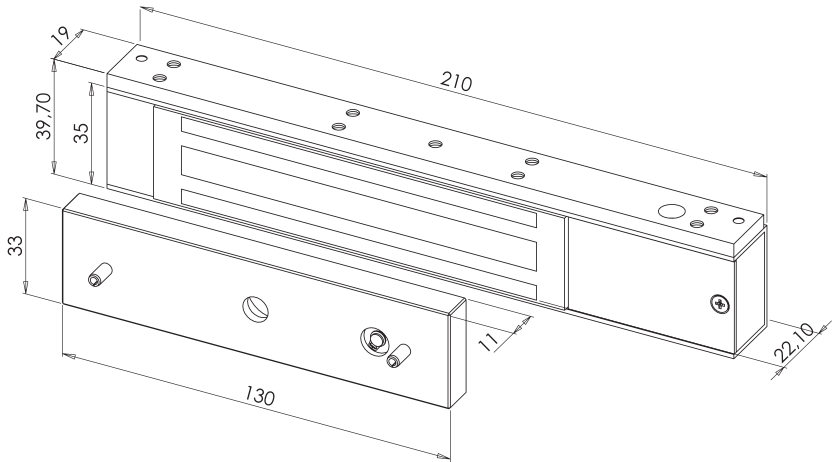

ITEM CODE	DESCRIPTION
EF150CTC	Surface-mounted EML 150 daN - 12-24V DC - contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions