


VELMAG® – MORTISE

150 daN – contact

EML

Voltage	12V DC	24V DC
Consumption	480mA	240 mA

TECHNICAL SPECIFICATIONS			
Holding force*	Temperature	IP rating	Switching capacity
150 daN	-10 / +55°C	IP42	24V DC – 1 A

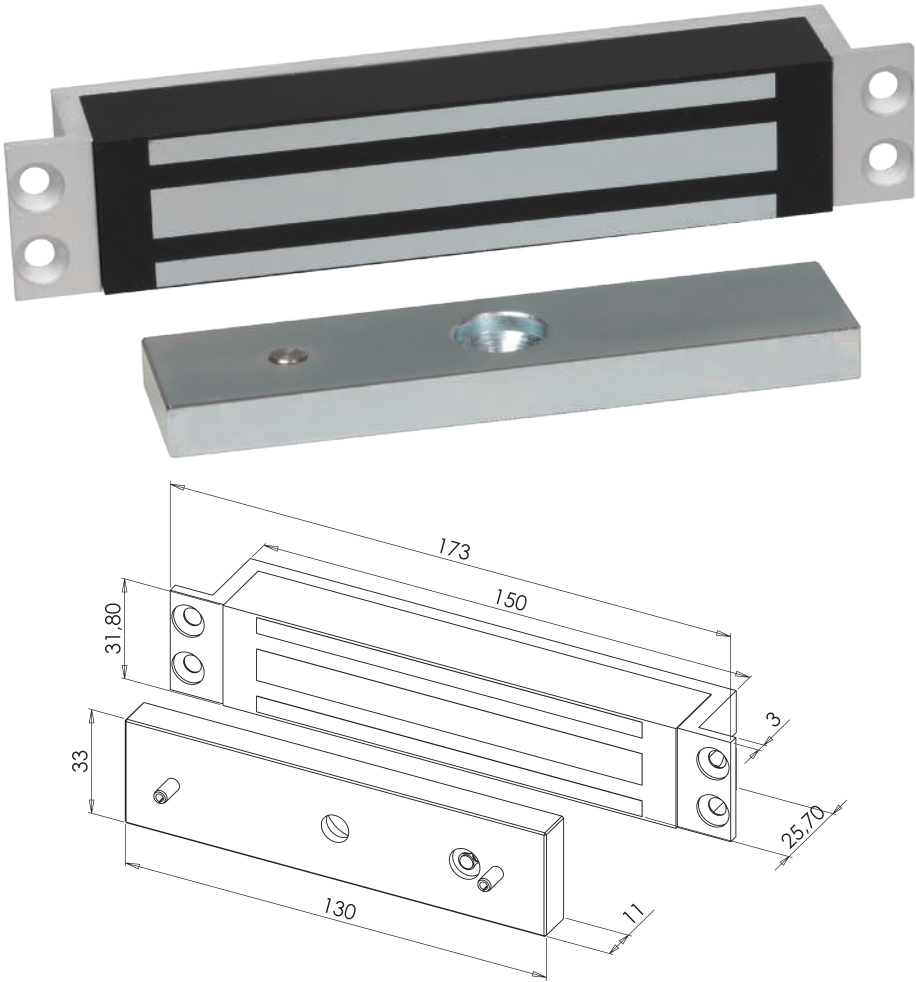

ITEM CODE	DESCRIPTION
EF150ENCCTC CA	Mortise EML – 150 daN – 12-24V DC – contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions