


VELMAG® – DOUBLE

300 daN – contact

Voltage	12V DC	24V DC
Consumption	2 x 480 mA	2 x 480 mA

TECHNICAL SPECIFICATIONS			
Holding force*	Temperature	IP rating	Switching capacity
2 x 300daN	-10 / +55°C	IP42	24V DC – 2 A

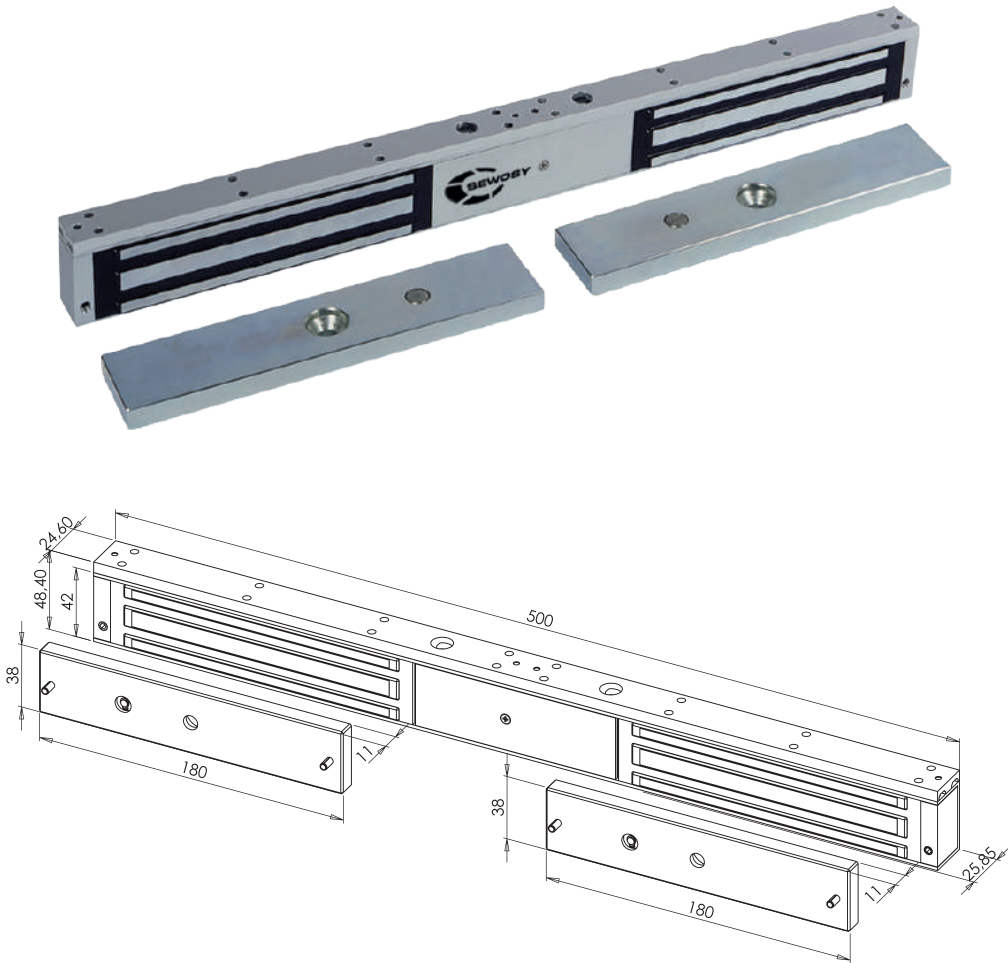

ITEM CODE	DESCRIPTION
EF300-2CTC	Double surface-mounted EML – 300 daN – 12-24V DC – contact