


VELMAG® – SURFACE-MOUNTED

300 daN – contact – 48V DC

Voltage	24V DC	48V DC
Consumption	300 mA	150 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	Temperature -10 / +55°C	IP rating IP42	Switching capacity 24V DC – 2 A

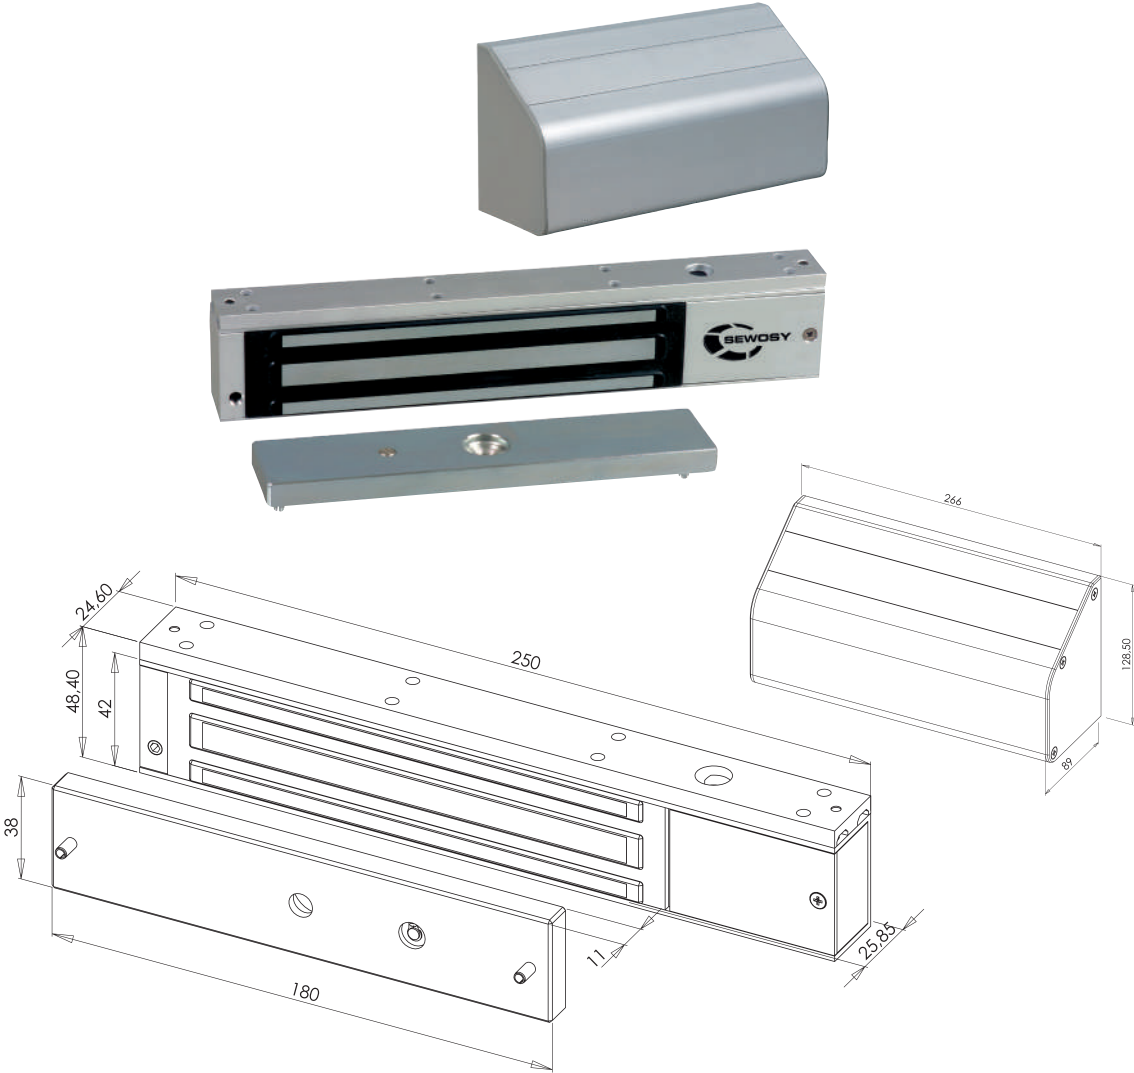

ITEM CODE	DESCRIPTION
EF300CTC/I_NFS	Surface-mounted EML – 300 daN – 24-48V DC – contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions