


# VELMAG® – SURFACE-MOUNTED

300 daN – contact and door information

| Voltage     | 12V DC | 24V DC |
|-------------|--------|--------|
| Consumption | 480 mA | 240 mA |

| TECHNICAL SPECIFICATIONS |             |           |                    |
|--------------------------|-------------|-----------|--------------------|
| Holding force*           | Temperature | IP rating | Switching capacity |
| 300 daN                  | -10 / +55°C | IP42      | 24V DC - 2 A       |

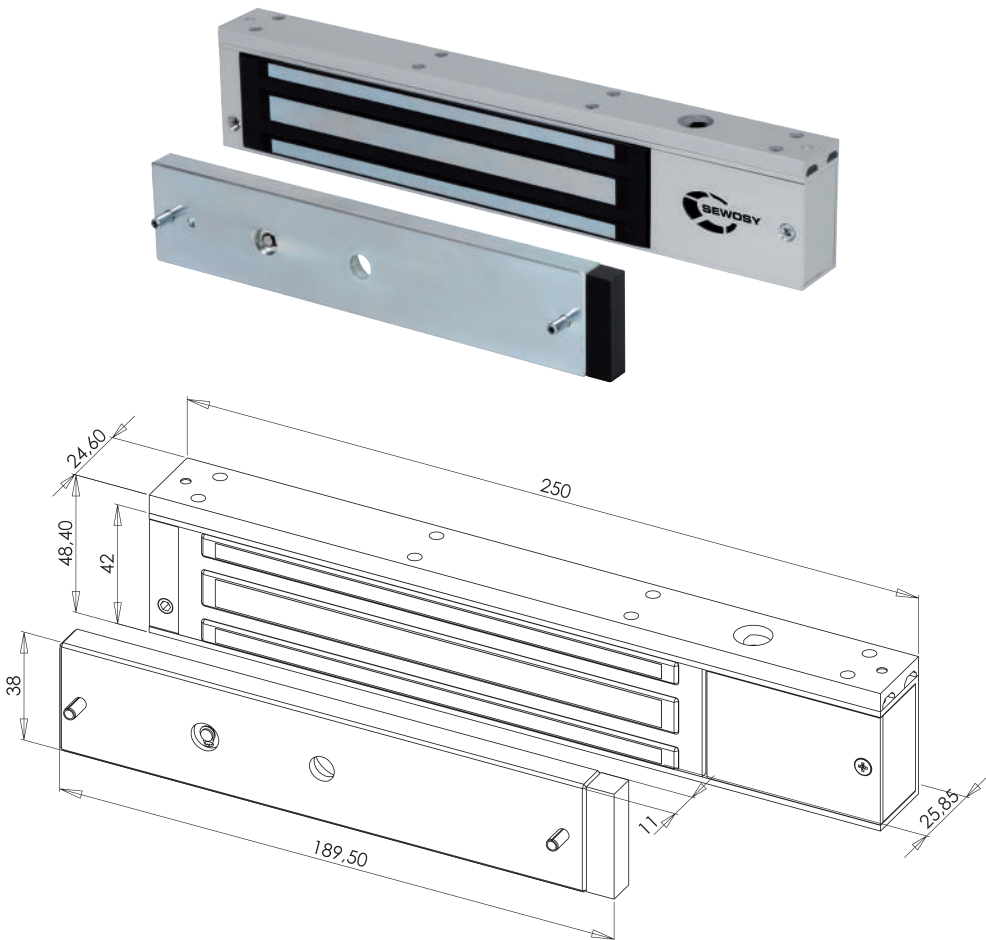

| ITEM CODE                   | DESCRIPTION                                                          |
|-----------------------------|----------------------------------------------------------------------|
| EF300CTC-R                  | Surface-mounted EML – 300 daN 12-24V DC – contact & door information |
| EF300CTC-R_NFS <sup>Δ</sup> | Surface-mounted EML – 300 daN 12-24V DC – contact & door information |