


VELMAG® – SURFACE PACK


Pull door 300 daN – contact

Voltage	12V DC	24V DC
Consumption	480 mA	240 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	Temperature -10 / +55°C	IP rating IP42	Switching capacity 24V DC – 2 A

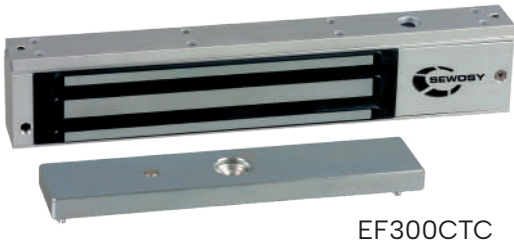

EF300CTC

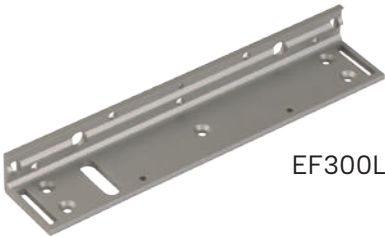

EF300L



EF300/550Z

ITEM CODE	DESCRIPTION
EF300CTC_PULL	Surface-mounted pull door pack – 300 daN – 12-24V DC – contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions