


VELMAG® – SURFACE-MOUNTED

500 daN – contact – 48V DC

Voltage	24V DC	48V DC
Consumption	240 mA	145 mA

TECHNICAL SPECIFICATIONS			
Holding force* 500 daN	Temperature -10 / +55°C	IP rating IP42	Switching capacity 24V DC – 2 A

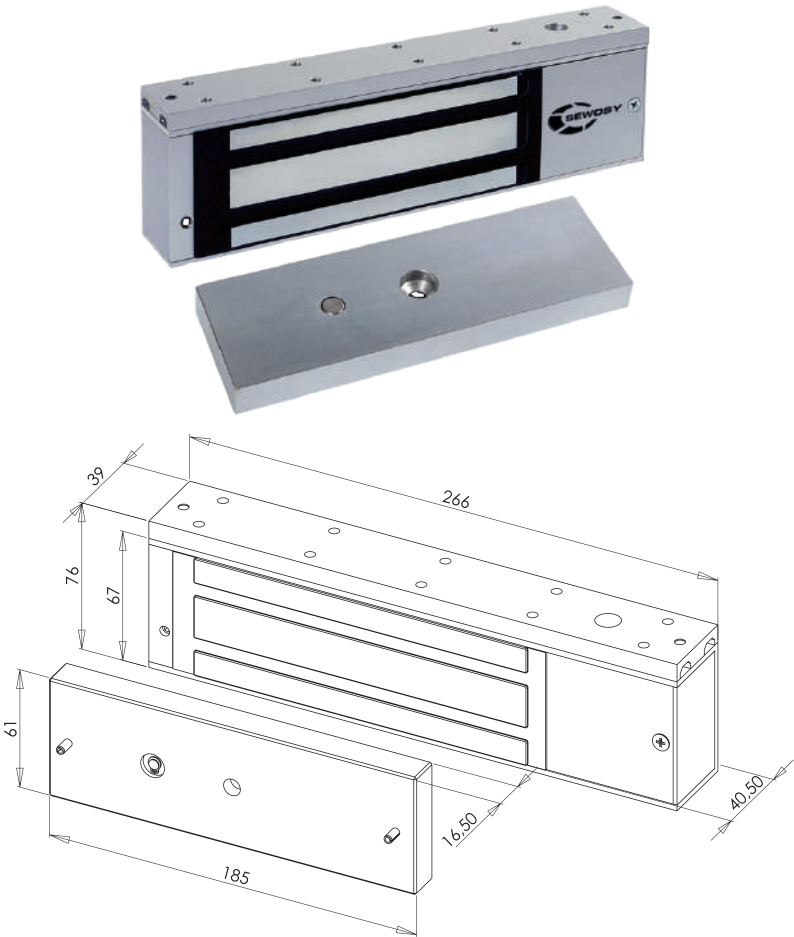

ITEM CODE	DESCRIPTION
EF550CTC/I	Surface-mounted EML – 500 daN – 24-48V DC – contact