


VELMAG® – SURFACE-MOUNTED

500 daN – contact and door information

EML

Voltage	12V DC	24V DC
Consumption	480 mA	240 mA

TECHNICAL SPECIFICATIONS			
Holding force* 500 daN	Temperature -10 / +55°C	IP rating IP42	Switching capacity 24V DC - 2 A

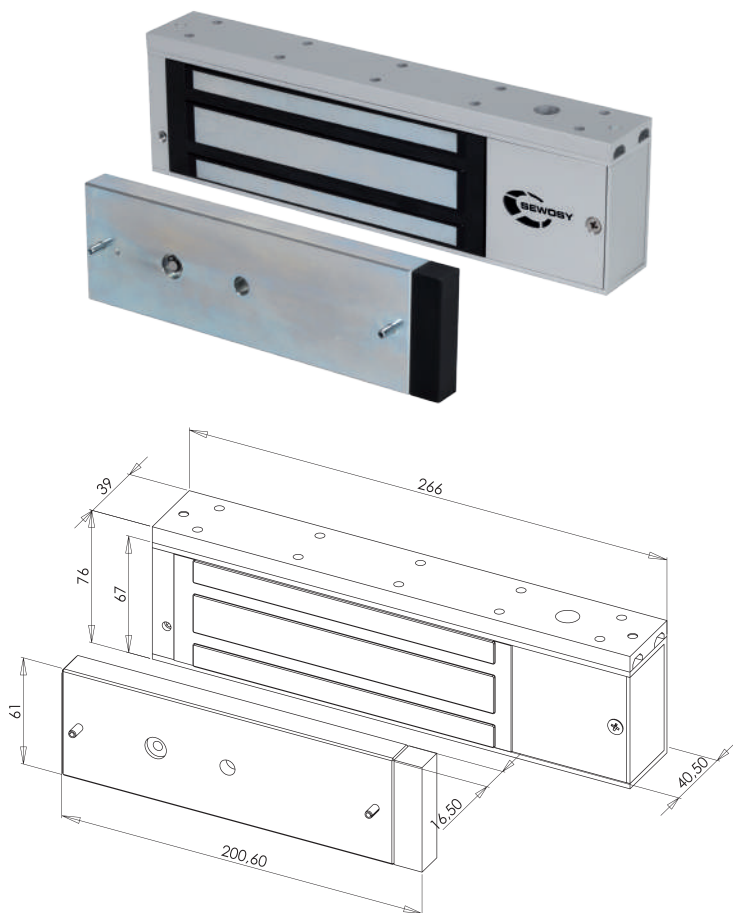

ITEM CODE	DESCRIPTION
EF550CTC-R	Surface-mounted EML 500 daN 12-24V DC – contact & door information
EF550CTC-R_NFS [^]	Surface-mounted EML 500 daN 12-24V DC – contact & door information

*Maximum theoretical holding force for implementation respecting optimal installation conditions
[^]For French market only