

VELMAG® – SURFACE PACK


Push door 500 daN – contact

Voltage	12V DC	24V DC
Consumption	480 mA	240 mA

TECHNICAL SPECIFICATIONS			
Holding force*	Temperature	IP rating	Switching capacity
500 daN	-10 / +55°C	IP42	24V DC – 2 A



EF550CTC

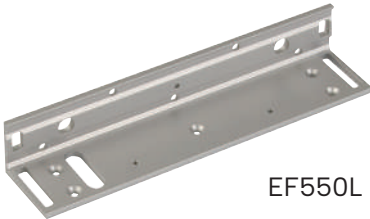

EF550L



EF550SCP

ITEM CODE	DESCRIPTION
EF550CTC_PUSH	Surface-mounted push door pack – 500 daN – 12-24V DC – contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions