


VELMAG® – EXTERIOR

180 daN – contact

Voltage	12V DC	24V DC
Consumption	350 mA	175 mA

TECHNICAL SPECIFICATIONS			
Holding force* 180 daN	Temperature -10 / +55°C	IP rating IP67	Switching capacity 24V DC - 1 A

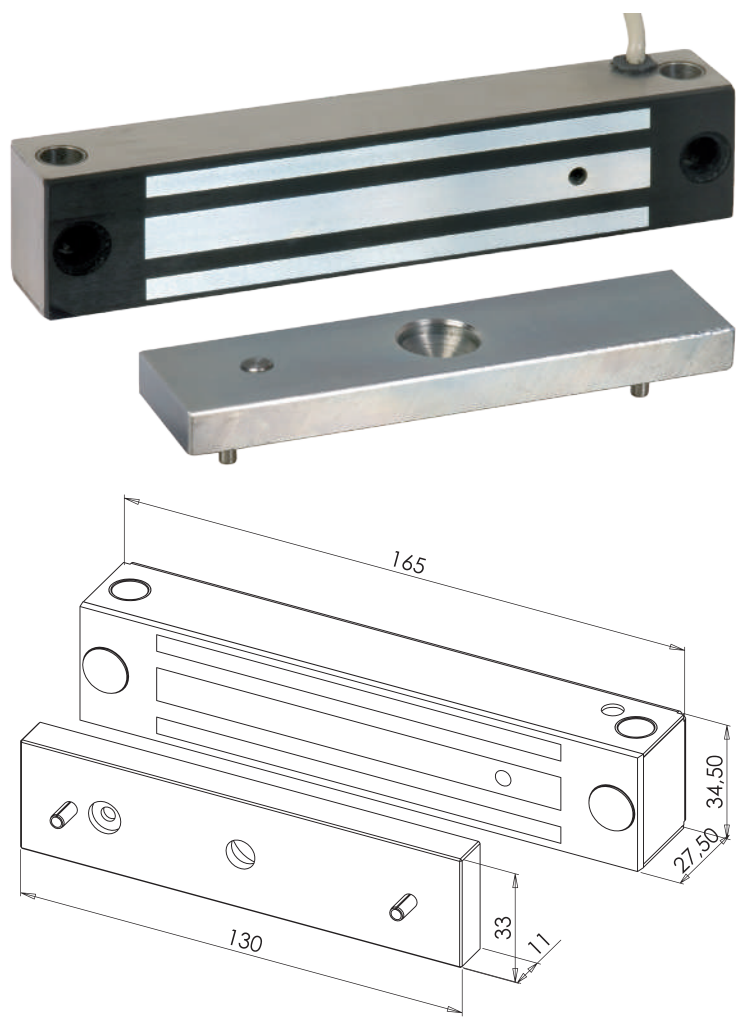

ITEM CODE	DESCRIPTION
EXT200CTC	Surface-mounted exterior EML - 180 daN - 12-24V DC - contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions