


VELMAG® – EXTERIOR

370 daN – contact

EML

Voltage	12V DC	24V DC
Consumption	500 mA	250 mA

TECHNICAL SPECIFICATIONS			
Holding force* 370 daN	Temperature -10 / +55°C	IP rating IP67	Switching capacity 24V DC - 1 A

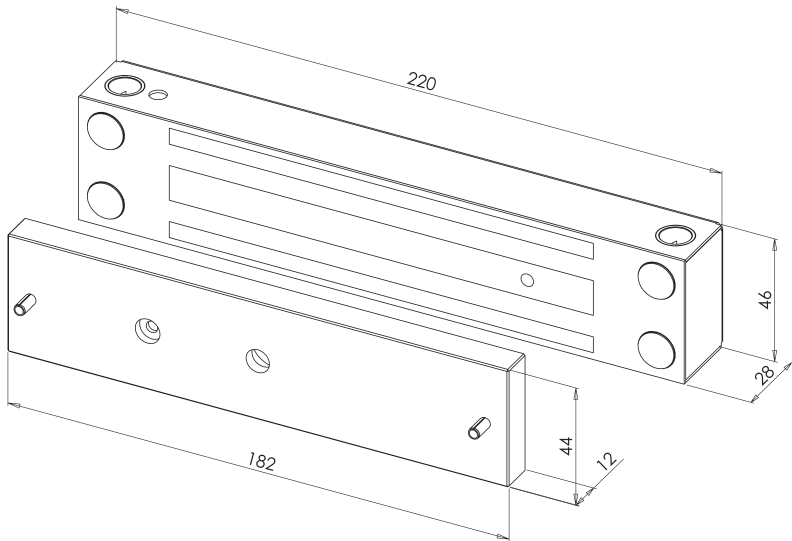

ITEM CODE	DESCRIPTION
EXT400CTC	Surface-mounted exterior EML – 370 daN – 12-24V DC – contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions