


STANDARD STRIKES

Fail secure

Voltage	12V AC	24V AC	12V DC	24V DC
Consumption	200 mA	400 mA	280 mA	570 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	IP rating IP42	Temperature -10 / +60°C	Electronic protection Yes

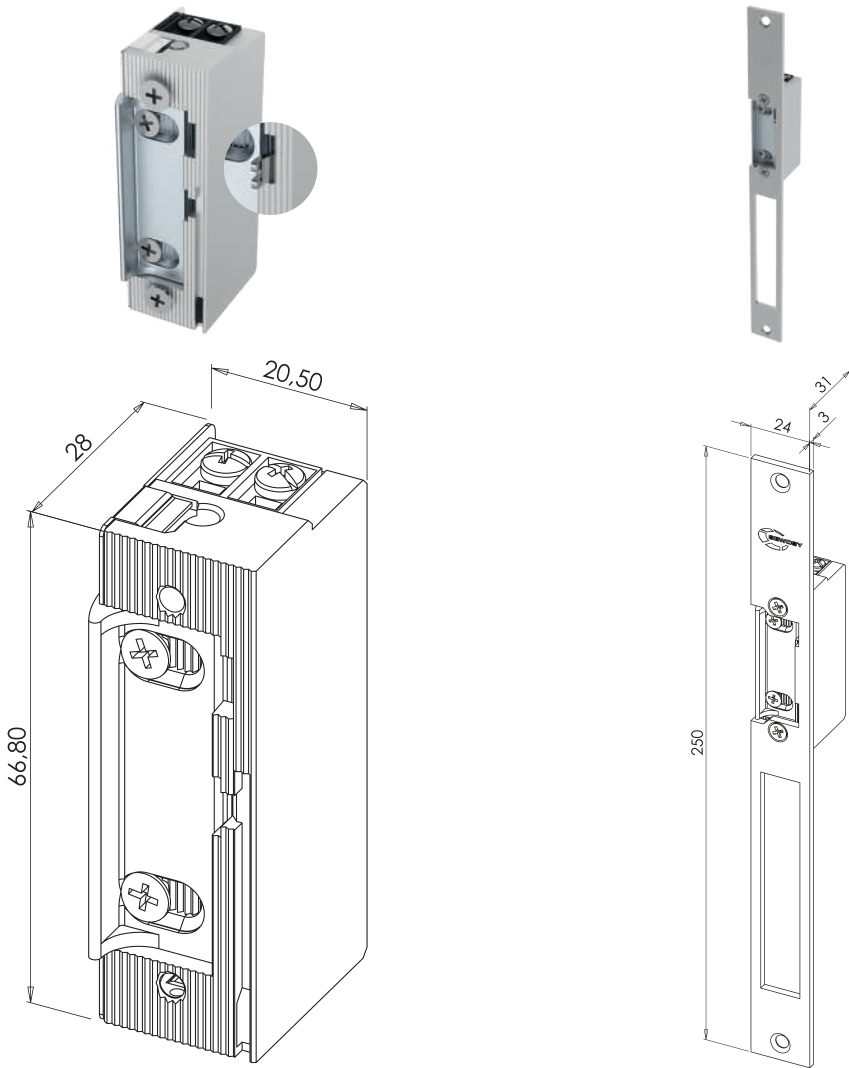

ITEM CODE	DESCRIPTION
SE1	Fail secure strike - 12-24V AC/DC
SE1O	Fail secure strike - 12-24V AC/DC - OPEM lever
SE1-203	Fail secure strike - 12-24V AC/DC + faceplate
SE1O-203	Fail secure strike - 12-24V AC/DC + OPEM lever + faceplate

*Maximum theoretical holding force for implementation respecting optimal installation conditions.