


STANDARD STRIKES

Fail secure – memory

Voltage	12V AC	24V AC	12V DC	24V DC
Consumption	270 mA	540 mA	350 mA	690 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	IP rating IP42	Temperature -10 / +60°C	Electronic protection Yes

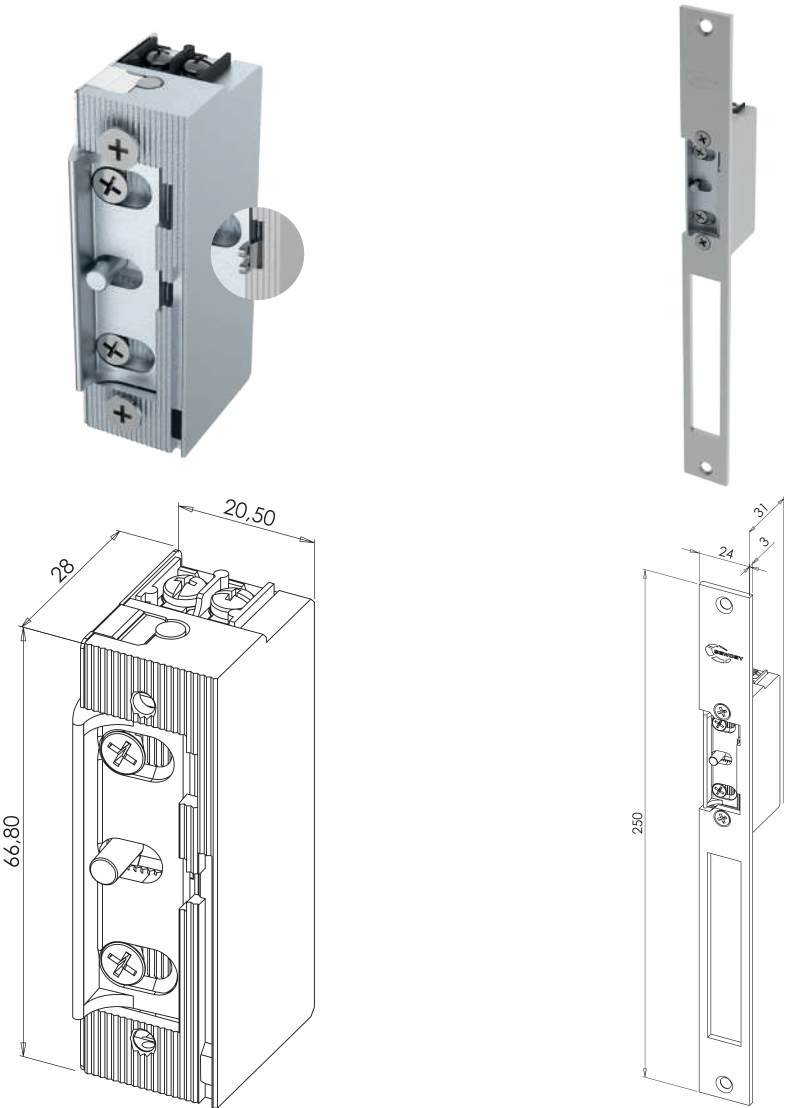

ITEM CODE	DESCRIPTION
SE2	Memory strike – 12-24V AC/DC
SE2O	Memory strike – 12-24V AC/DC – OPEM lever
SE2-203	Memory strike – 12-24V AC/DC + faceplate
SE2O-203	Memory strike – 12-24V AC/DC + OPEM lever + faceplate

*Maximum theoretical holding force for implementation respecting optimal installation conditions.