


STANDARD STRIKES

Fail safe

Voltage	12V DC	24V DC
Consumption	210 mA	110 mA

TECHNICAL SPECIFICATIONS			
Holding force*	IP rating	Temperature	Electronic protection
300 daN	IP42	-10 / +60°C	Yes

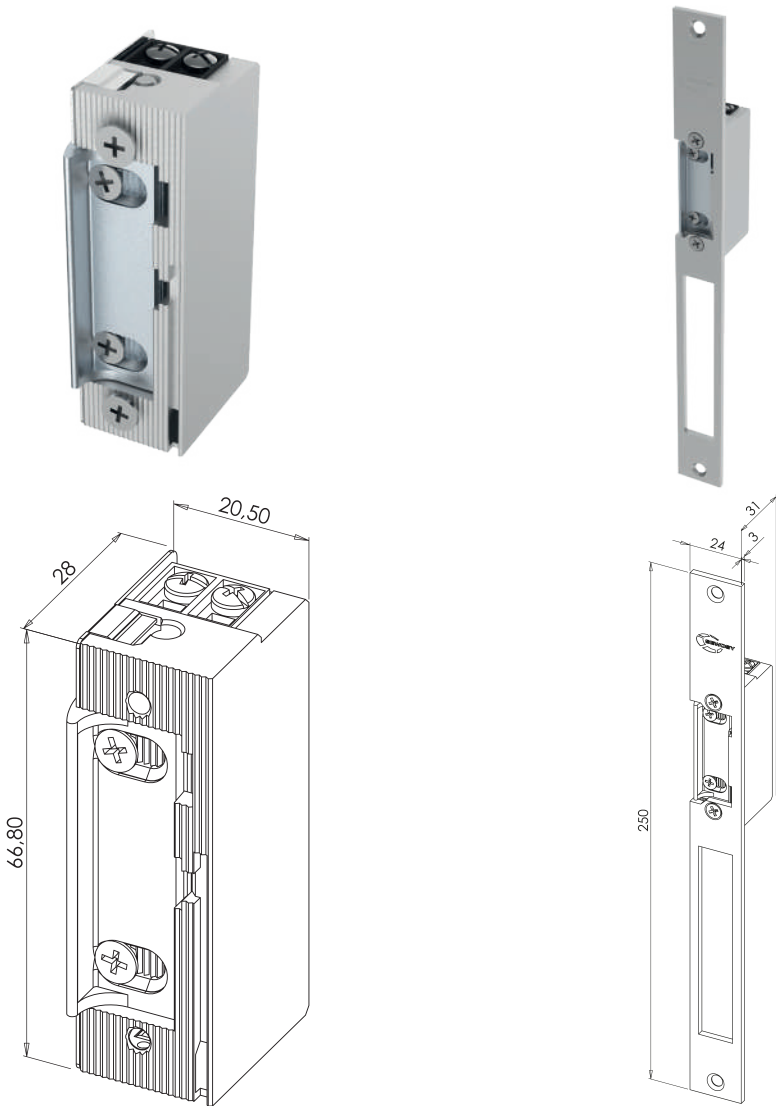

ITEM CODE	DESCRIPTION
SE3	Fail safe strike - 12V DC
SE3/24	Fail safe strike - 24V DC
SE3-203	Fail safe strike 12V DC + faceplate
SE3/24-203	Fail safe strike 24V DC + faceplate