


REVERSIBLE SURFACE STRIKES

90 – horizontal locks

Voltage	12V AC	24V AC	12V DC	24V DC
Consumption	285 mA	570 mA	400 mA	800 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	IP rating IP42	Temperature -25 / +50°C	Installation direction Reversible

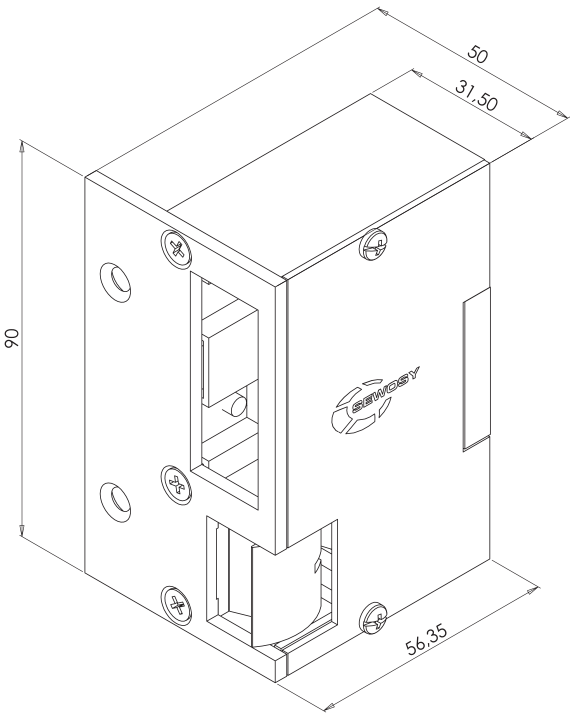

ITEM CODE	DESCRIPTION
SEA190_R	Surface-mounted fail secure strike – 90 mm – 12-24V AC/DC
SEA290_R	Surface-mounted memory strike – 90 mm – 12-24V AC/DC
SEA390_R	Surface-mounted fail safe strike – 90 mm – 12V DC