


# REVERSIBLE SURFACE STRIKES

## 120 – vertical locks

| Voltage     | 12V AC | 24V AC | 12V DC | 24V DC |
|-------------|--------|--------|--------|--------|
| Consumption | 285 mA | 570 mA | 400 mA | 800 mA |

| TECHNICAL SPECIFICATIONS  |                   |                            |                                      |
|---------------------------|-------------------|----------------------------|--------------------------------------|
| Holding force*<br>300 daN | IP rating<br>IP42 | Temperature<br>-25 / +50°C | Installation direction<br>Reversible |

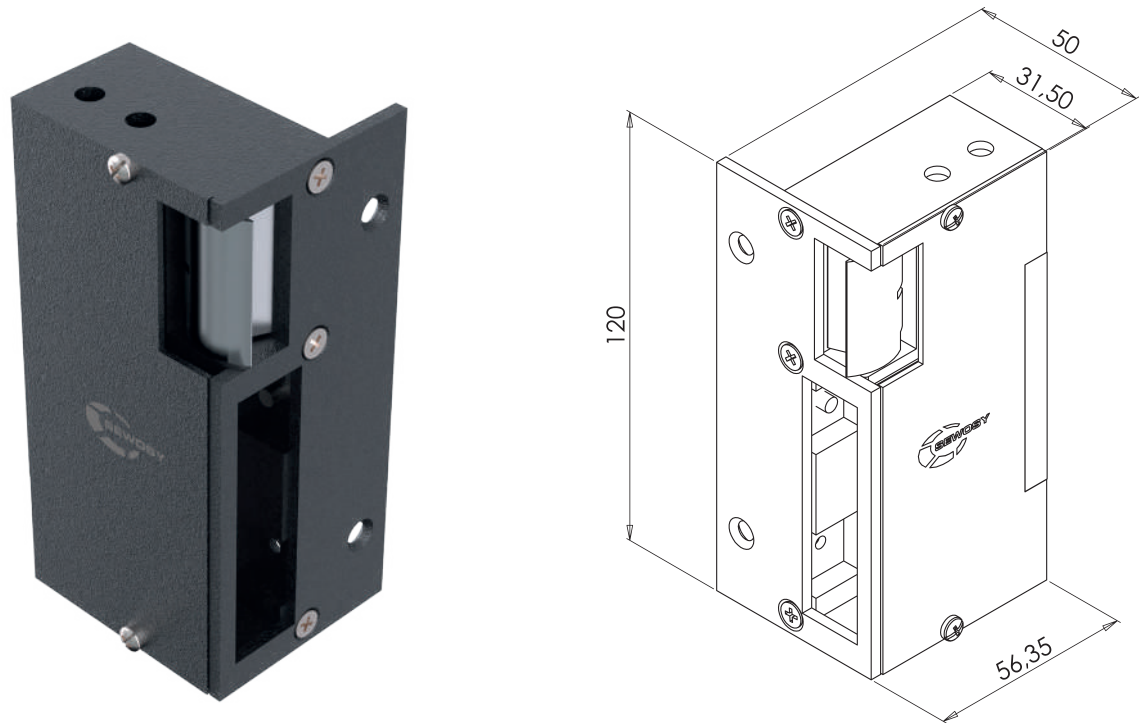

| ITEM CODE | DESCRIPTION                                                |
|-----------|------------------------------------------------------------|
| SEA1120_R | Surface-mounted fail secure strike – 120 mm – 12-24V AC/DC |
| SEA2120_R | Surface-mounted memory strike – 120 mm – 12-24V AC/DC      |
| SEA3120_R | Surface-mounted fail safe strike – 120 mm – 12V DC         |

\*Maximum theoretical holding force for implementation respecting optimal installation conditions.