
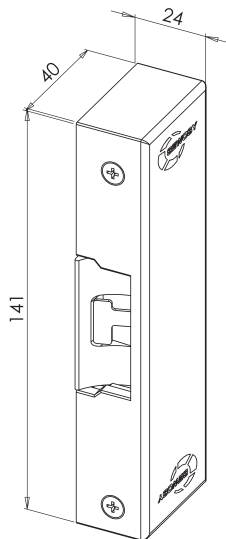


PANIC STRIKES

Fail secure

Voltage	12V AC	24V AC	12V DC	24V DC
Consumption	200 mA	400 mA	280 mA	570 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	IP rating IP42	Temperature -25 / +50°C	Switching capacity 30V DC - 2 A

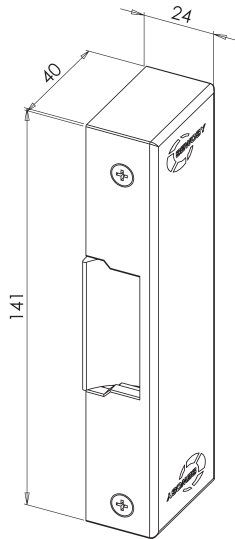

ITEM CODE	DESCRIPTION
SEAPI	Panic fail secure strike – 12-24V AC/DC
SEAPC1	Panic fail secure strike – 12-24V AC/DC – contact

*Maximum theoretical holding force for implementation respecting optimal installation conditions.