
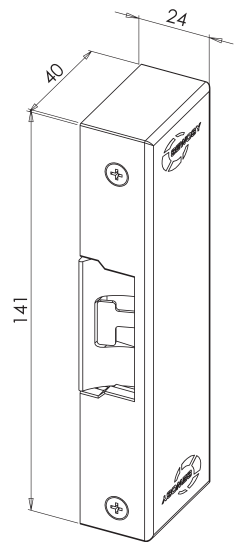


PANIC STRIKES

Fail safe

Voltage	12V DC	24V DC
Consumption	280 mA	185 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	IP rating IP42	Temperature -25 / +50°C	Switching capacity 30V DC - 2 A

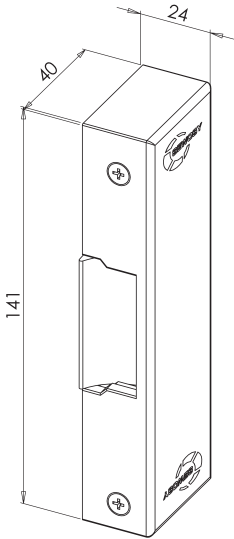

ITEM CODE	DESCRIPTION
SEAP3	Panic fail safe strike - 12-24V DC
SEAPC3	Panic fail safe strike - 12-24V DC - contact