


ROUREG® – NARROW

Fail secure – invisible memory

Voltage	12V AC	24V DC	12V DC	24V DC
Consumption	308 mA	615 mA	400 mA	800 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	IP rating IP42	Temperature -10 / +60°C	Electronic protection Yes

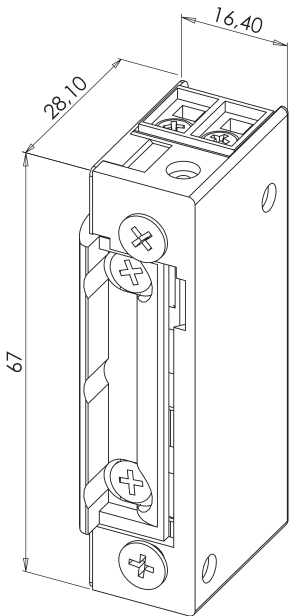

ITEM CODE	DESCRIPTION
SEE2MI	Narrow strike with invisible memory – 12-24V AC/DC
SEE2MIL	Narrow strike with invisible memory – 12-24V AC/DC – OPEM lever

*Maximum theoretical holding force for implementation respecting optimal installation conditions.