


ROUREG® – NARROW

Fail safe

Voltage	12V DC	24V DC
Consumption	210 mA	110 mA

TECHNICAL SPECIFICATIONS			
Holding force* 300 daN	IP rating IP42	Temperature -10 / +60°C	Electronic protection Yes

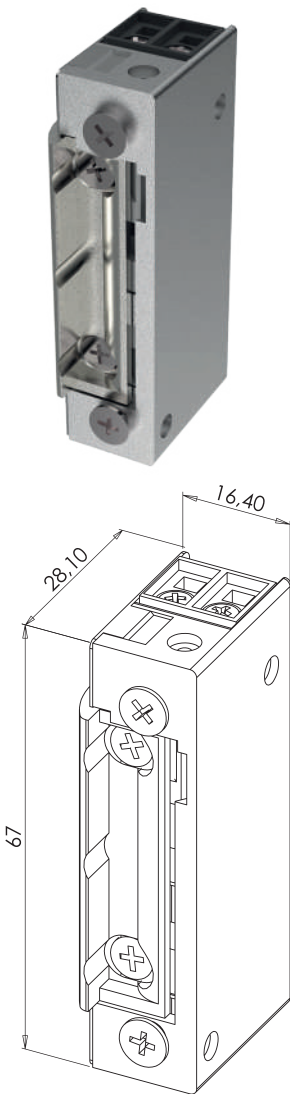

ITEM CODE	DESCRIPTION
SEE3	Narrow fail safe strike – 12V DC
SEE3/24	Narrow fail safe strike – 24V DC

*Maximum theoretical holding force for implementation respecting optimal installation conditions.