


ROUREG®

Fail secure

Voltage	12V AC	24V AC	12V DC	24V DC
Consumption	220 mA	430 mA	280 mA	560 mA

TECHNICAL SPECIFICATIONS			
Holding force* 350 daN	IP rating IP42	Temperature -10 / +60°C	Electronic protection Yes

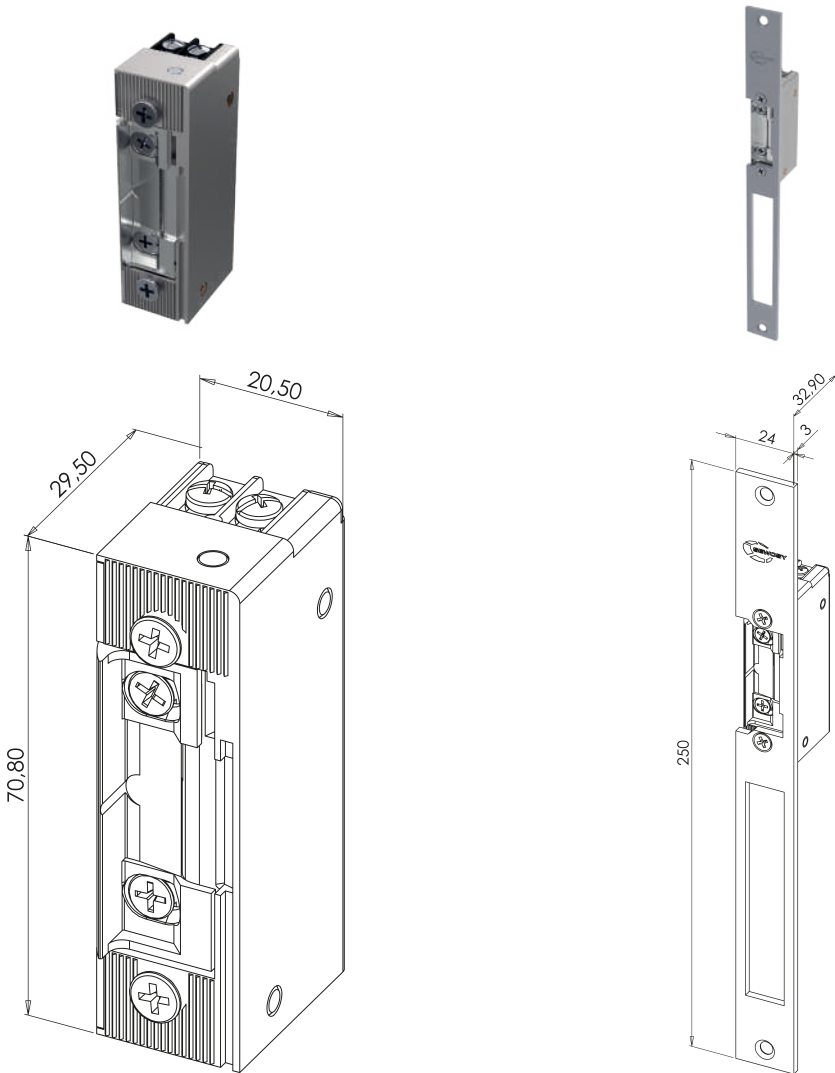

ITEM CODE	DESCRIPTION
SER1	ROUREG strike – fail secure – 12-24V AC/DC
SER1/24	ROUREG strike – fail secure – 24V DC
SER1-203	ROUREG strike – fail secure – 12-24V AC/DC + faceplate
SER1/24-203	ROUREG strike – fail secure – 24V DC + faceplate

*Maximum theoretical holding force for implementation respecting optimal installation conditions.