ROUREG®

Fail secure – position contact

Voltage	12V AC	24V AC	12V DC	24V DC
Consumption	220 mA	430 mA	280 mA	560 mA

TECHNICAL SPECIFICATIONS			
Holding force*	**IP rating**	**Temperature**	**Electronic protection**
350 daN	IP42	-10 / +60°C	Yes

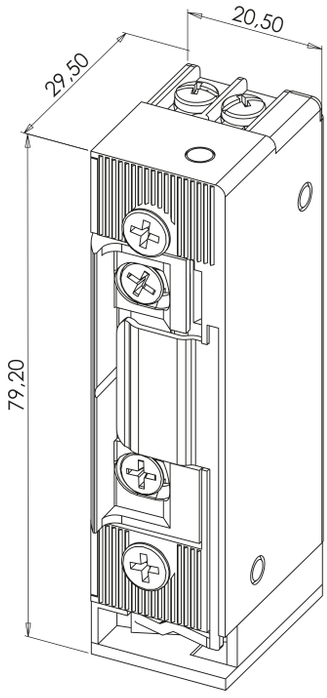

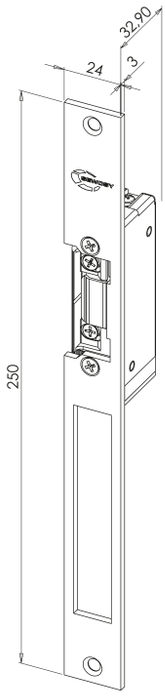

ITEM CODE	DESCRIPTION
SER1C	ROUREG strike – fail secure 12-24V AC/DC – contact
SER1C/24	ROUREG strike – fail secure – 24V DC – contact
SER1C-203	ROUREG strike – fail secure 12-24V AC/DC – contact + faceplate
SER1C/24-203	ROUREG strike – fail secure – 24V DC – contact + faceplate

*Maximum theoretical holding force for implementation respecting optimal installation conditions.

SEWOSY
A J3C Invest Company