
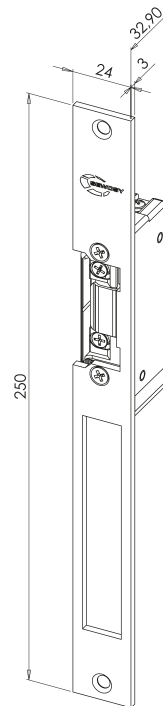


## Fail secure – position contact

Voltage	12V AC	24V AC	12V DC	24V DC	Only SERIC/24 24V DC
Consumption	220 mA	430 mA	280 mA	560 mA	170 mA

TECHNICAL SPECIFICATIONS			
<b>Holding force*</b> 350 daN	<b>IP rating</b> IP42	<b>Temperature</b> -25 / +50°C	<b>Electronic protection</b> Yes

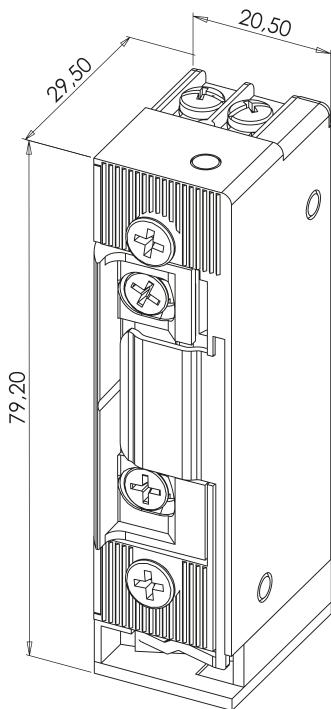

ITEM CODE	DESCRIPTION
SERIC	ROUREG strike – fail secure 12–24V AC/DC – contact
SERIC/24	ROUREG strike – fail secure – 24V DC – contact
SERIC-203	ROUREG strike – fail secure 12–24V AC/DC – contact + faceplate
SERIC/24-203	ROUREG strike – fail secure – 24V DC – contact + faceplate

\*Maximum theoretical holding force for implementation respecting optimal installation conditions.