ROUREG®
Fail safe

Voltage	12V DC	24V DC
Consumption	210 mA	100 mA

TECHNICAL SPECIFICATIONS			
Holding force*	**IP rating**	**Temperature**	**Electronic protection**
350 daN	IP42	-10 / +60°C	Yes

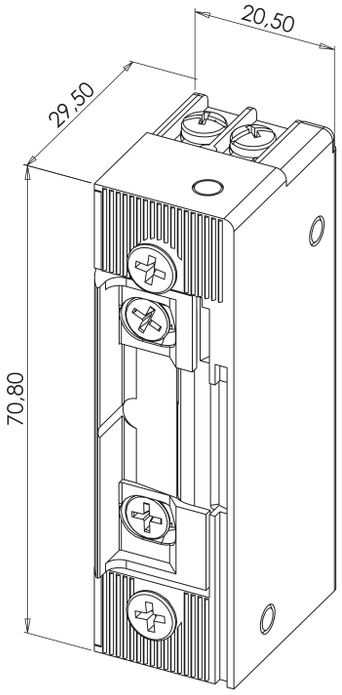

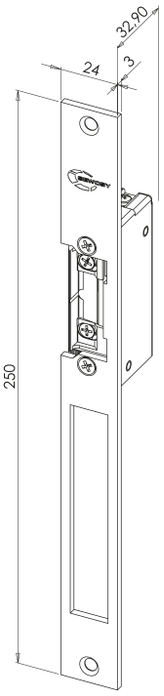

ITEM CODE	DESCRIPTION
SER3	ROUREG strike – fail safe – 12V DC
SER3/24	ROUREG strike – fail safe – 24V DC
SER3-203	ROUREG strike – fail safe – 12V DC + faceplate
SER3/24-203	ROUREG strike – fail safe – 24V DC + faceplate

*Maximum theoretical holding force for implementation respecting optimal installation conditions.