ROUREG®

Fail safe – position contact

Voltage	12V DC	24V DC
Consumption	210 mA	100 mA

TECHNICAL SPECIFICATIONS			
Holding force*	**IP rating**	**Temperature**	**Electronic protection**
350 daN	IP42	-10 / +60°C	Yes

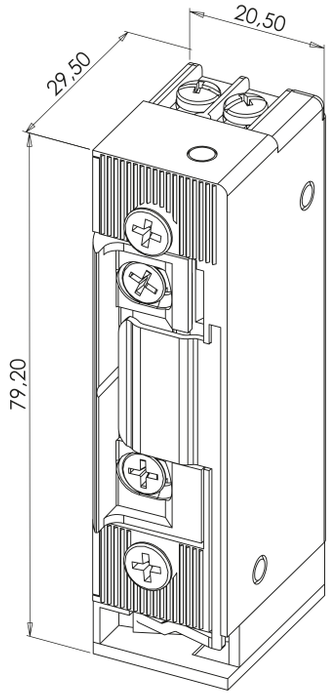

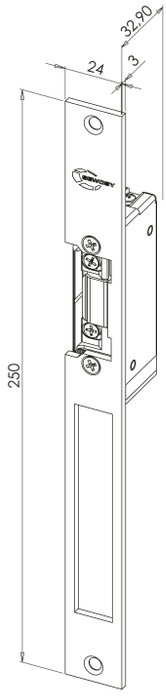

ITEM CODE	DESCRIPTION
SER3C	ROUREG Strike – fail safe – 12V DC – contact
SER3C/24	ROUREG Strike – fail safe – 24V DC – contact
SER3C-203	ROUREG Strike – fail safe – 12V DC – contact + faceplate
SER3C/24-203	ROUREG Strike – fail safe – 24V DC – contact + faceplate

*Maximum theoretical holding force for implementation respecting optimal installation conditions.

SEWOSY
A J3C Invest Company