
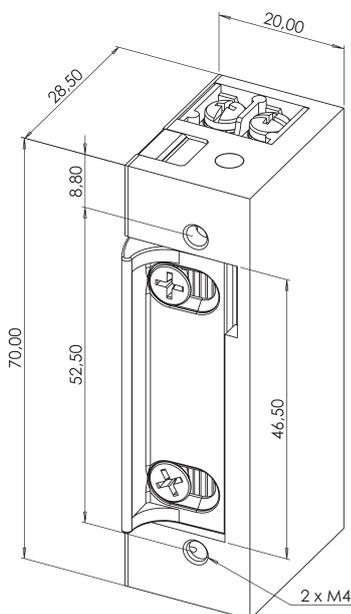


UNIVERSAL STANDARD STRIKE

Fail secure and fail safe¹

Voltage	12V AC	24V AC	12V DC	24V DC
Consumption	200 mA	390 mA	250 mA	500 mA

TECHNICAL SPECIFICATIONS			
Holding force ² 300 daN	IP rating IP42	Temperature -10 / +60°C	Electronic protection No

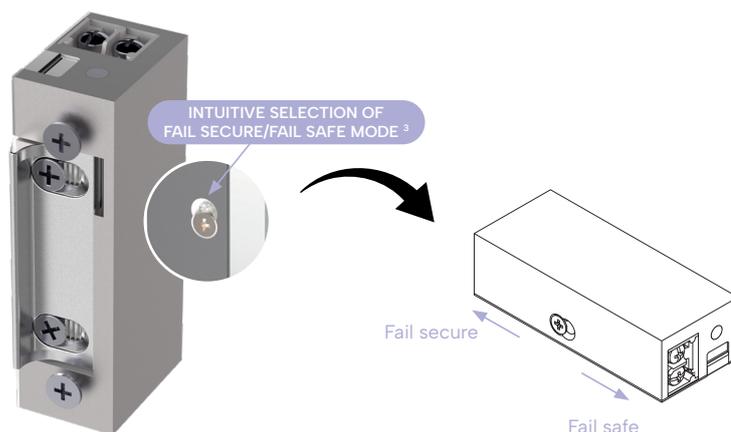

ITEM CODE	DESCRIPTION
SEU13	Fail secure and fail safe strike - 12-24V AC/DC

¹ Fail safe : 12V DC only

² Maximum theoretical holding force for implementation respecting optimal installation conditions.

³ Loosen the screw a quarter turn, then select the operating mode.