


VELMAG® – MORTISE

300 daN – 35 mm – contact – epoxy body

Voltage	12V DC	24V DC
Consumption	500 mA	250 mA

TECHNICAL SPECIFICATIONS			
Holding force*	Temperature	IP rating	Switching capacity
300 daN	-10 / +55°C	IP42	24V DC - 1 A

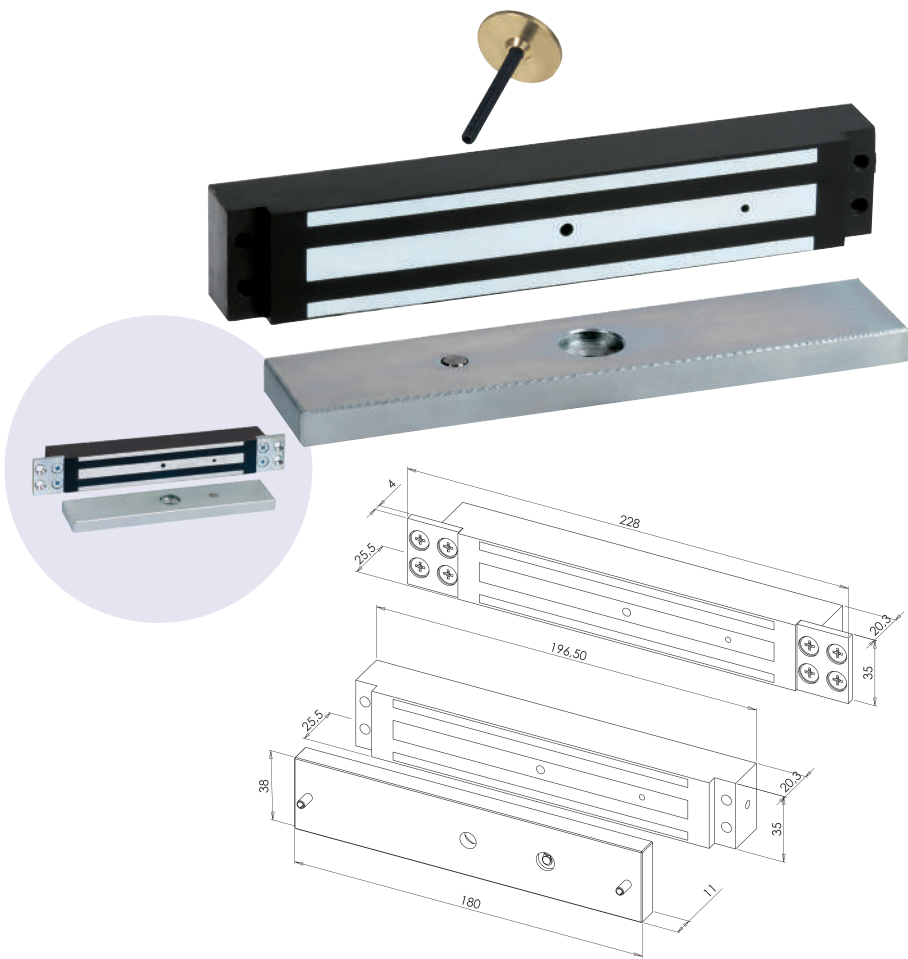

ITEM CODE	DESCRIPTION
V30035	Mortise EML – 300 daN – 12-24V DC
V30035C	Mortise EML – 300 daN – 12-24V DC – contact