
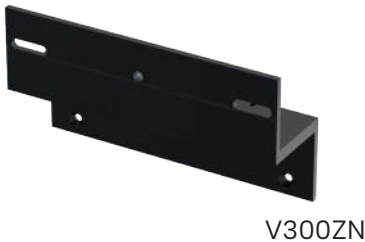
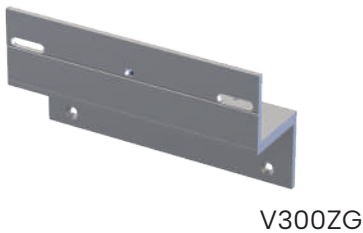


VELMAG® – SURFACE PACK

Pull door 300 daN – contact

Voltage	12V DC	24V DC
Consumption	430 mA	230 mA

TECHNICAL SPECIFICATIONS			
Holding force*	Temperature	IP rating	Switching capacity
300 daN	-10 / +55°C	IP42	24V DC – 2 A

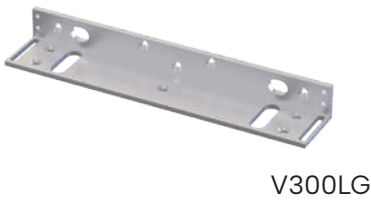

ITEM CODE	DESCRIPTION
V300G_PULL	Surface-mounted pull door pack – 300 daN – 12-24V DC – contact
V300N_PULL	Black surface-mounted pull door pack – 300 daN – 12-24V DC – contact

INTOM RANGE