


VELMAG® – EXTERIOR

200 daN

EML

Voltage	12V DC	24V DC
Consumption	260 mA	130mA

TECHNICAL SPECIFICATIONS			
Holding force* 200 daN	Temperature -10 / +55°C	IP rating IP67	Switching capacity 24V DC – 1 A

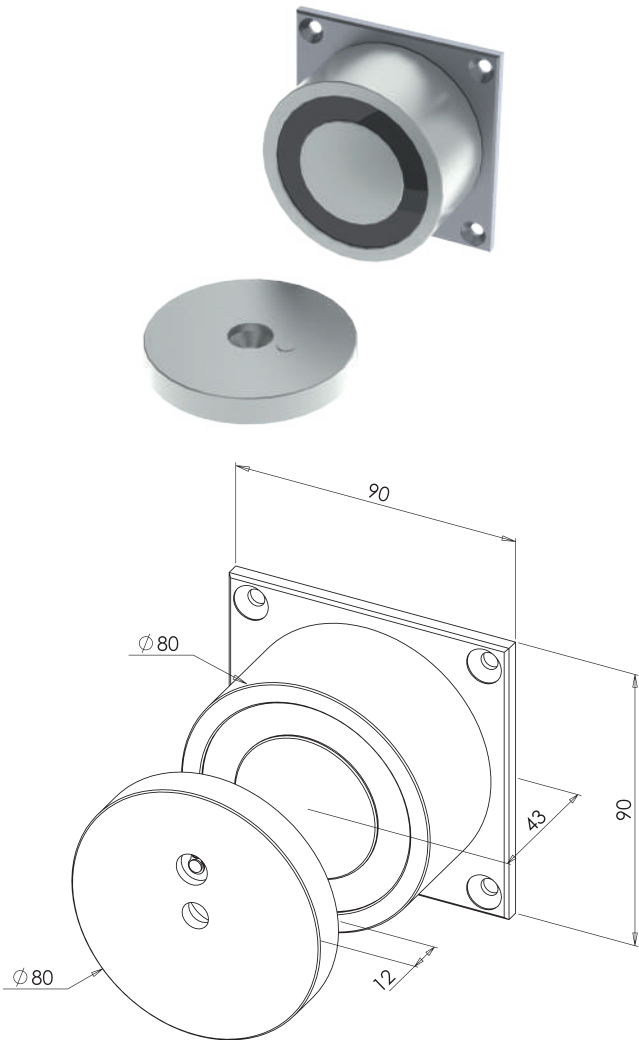

ITEM CODE	DESCRIPTION
VR200-80A	Round exterior surface-mounted EML – 200 daN – 12-24V DC

*Maximum theoretical holding force for implementation respecting optimal installation conditions